

01/27/98



UTILITY PATENT APPLICATION TRANSMITTAL <small>(Only for new nonprovisional applications under 37 CFR 1.63(b))</small>	Attorney Docket No. 1570/1820-US	Total Pages
	First Named Inventor or Application Identifier	
	Katsuaki MATSUI et al.	
	Express Mail Label No.	

APPLICATION ELEMENTS <small>See MPEP chapter 600 concerning utility patent application contents</small>	Assistant Commissioner for Patents ADDRESS TO: Box Patent Application Washington, D.C. 20231																				
<p>1. <input checked="" type="checkbox"/> Fee Transmittal Form <small>(Submit an original, and a duplicate for fee processing)</small></p> <p>2. <input checked="" type="checkbox"/> Specification [Total Pages 40] <small>(preferred arrangement set forth below)</small></p> <ul style="list-style-type: none">- Descriptive title of the invention- Cross References to Related Applications- Statement Regarding Fed sponsored R & D- Reference to Microfiche Appendix- Background of the Invention- Brief Summary of the Invention- Brief Description of the Drawings <small>(if filed)</small>- Detailed Description- Claim(s)- Abstract of the Disclosure <p>3. <input checked="" type="checkbox"/> Drawing(s) <small>(35 USC 112)</small> [Total sheets - 16]</p> <p>4. Oath or Declaration [Total Pages - 3]</p> <p>a. <input checked="" type="checkbox"/> Unexecuted (original or copy)</p> <p>b. <input type="checkbox"/> Copy from a prior application (37 CFR 1.63(d)) <small>(for continuation/divisional with Box 17 completed)</small> [Note Box 5 below]</p> <p>i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).</p> <p>5. <input type="checkbox"/> Incorporation By Reference <small>(usable if Box 4b is checked)</small> The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.</p>	<p>6. <input type="checkbox"/> Microfiche Computer Program <small>(Appendix)</small></p> <p>7. Nucleotide and/or Amino Acid Sequence Submission <small>(if applicable, all necessary)</small></p> <p>a. <input type="checkbox"/> Computer Readable Copy</p> <p>b. <input type="checkbox"/> Paper Copy (identical to computer copy)</p> <p>c. <input type="checkbox"/> Statement verifying identity of above copies</p> <table border="1"><tr><td colspan="2">ACCOMPANYING APPLICATION PARTS</td></tr><tr><td>8. <input type="checkbox"/> Assignment Papers (cover sheet & document(s))</td><td></td></tr><tr><td>9. <input type="checkbox"/> 37 CFR 3.73(b) Statement <input type="checkbox"/> Power of Attorney <small>(when there is an assignee)</small></td><td></td></tr><tr><td>10. <input type="checkbox"/> English Translation Document <small>(if applicable)</small></td><td></td></tr><tr><td>11. <input checked="" type="checkbox"/> Information Disclosure <input checked="" type="checkbox"/> Copies of IDS Statement (IDS)/PTO-1449 Citations</td><td></td></tr><tr><td>12. <input type="checkbox"/> Preliminary Amendment</td><td></td></tr><tr><td>13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) <small>(Should be specifically itemized)</small></td><td></td></tr><tr><td>14. <input type="checkbox"/> Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application, Status still proper and desired</td><td></td></tr><tr><td>15. <input checked="" type="checkbox"/> Certified Copy of Priority Document(s) <small>(if foreign priority is claimed)</small></td><td></td></tr><tr><td>16. <input type="checkbox"/> Other</td><td></td></tr></table> <p>THE COMMISSIONER IS AUTHORIZED TO CHARGE ANY DEFICIENCY IN THE FEE FOR THIS PAPER TO DEPOSIT ACCOUNT NO. 23-0975.</p>	ACCOMPANYING APPLICATION PARTS		8. <input type="checkbox"/> Assignment Papers (cover sheet & document(s))		9. <input type="checkbox"/> 37 CFR 3.73(b) Statement <input type="checkbox"/> Power of Attorney <small>(when there is an assignee)</small>		10. <input type="checkbox"/> English Translation Document <small>(if applicable)</small>		11. <input checked="" type="checkbox"/> Information Disclosure <input checked="" type="checkbox"/> Copies of IDS Statement (IDS)/PTO-1449 Citations		12. <input type="checkbox"/> Preliminary Amendment		13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) <small>(Should be specifically itemized)</small>		14. <input type="checkbox"/> Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application, Status still proper and desired		15. <input checked="" type="checkbox"/> Certified Copy of Priority Document(s) <small>(if foreign priority is claimed)</small>		16. <input type="checkbox"/> Other	
ACCOMPANYING APPLICATION PARTS																					
8. <input type="checkbox"/> Assignment Papers (cover sheet & document(s))																					
9. <input type="checkbox"/> 37 CFR 3.73(b) Statement <input type="checkbox"/> Power of Attorney <small>(when there is an assignee)</small>																					
10. <input type="checkbox"/> English Translation Document <small>(if applicable)</small>																					
11. <input checked="" type="checkbox"/> Information Disclosure <input checked="" type="checkbox"/> Copies of IDS Statement (IDS)/PTO-1449 Citations																					
12. <input type="checkbox"/> Preliminary Amendment																					
13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) <small>(Should be specifically itemized)</small>																					
14. <input type="checkbox"/> Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application, Status still proper and desired																					
15. <input checked="" type="checkbox"/> Certified Copy of Priority Document(s) <small>(if foreign priority is claimed)</small>																					
16. <input type="checkbox"/> Other																					
17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information: <input type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input type="checkbox"/> Continuation-in-part (CIP) of prior application No.																					
18. CORRESPONDENCE ADDRESS																					
Attn.: Nils E. Pedersen WENDEROTH, LIND & PONACK Southern Building - Suite 700 805 Fifteenth Street, N.W. Washington, D.C. 20005																					
Phone: (202) 371-8850 Fax: (202) 371-8856																					

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of : Attn: APPLICATION BRANCH
Katsuaki MATSUI et al. : Docket No. 1570/1820-US
Serial No. [Not yet assigned] :
Filed January 27, 1998 :
METHOD AND DEVICE FOR : THE COMMISSIONER IS AUTHORIZED
GENERATING CONSTANT VOLTAGE : TO CHARGE ANY DEFICIENCY IN THE
FEE FOR THIS PAPER TO DEPOSIT
ACCOUNT NO. 23-0975.

PATENT OFFICE FEE TRANSMITTAL FORM

Assistant Commissioner for Patents,
Washington, D.C.

Sir:

Attached hereto is a check in the amount of \$1,118.00
to cover Patent Office fees relating to filing the following
attached papers:

New application \$1,118.00
Assignment for recordation \$
Other \$

A duplicate copy of this paper is being submitted for
use in the Accounting Division, Office of Finance.

*The Commissioner is authorized to charge any deficiency
or to credit any overpayment associated with this communication
to Deposit Account No. 23-0975, with the EXCEPTION of
deficiencies in fees for multiple dependent claims in new
applications.*

Respectfully submitted,

Katsuaki MATSUI et al.

By

Nils E. Pedersen
Nils E. Pedersen
Registration No. 33,145
Attorney for Applicants

THE COMMISSIONER IS AUTHORIZED
TO CHARGE ANY DEFICIENCY IN THE
FEE FOR THIS PAPER TO DEPOSIT
ACCOUNT NO. 23-0975.

NEP/knw
WENDEROTH, LIND & PONACK
805 Fifteenth St., N.W., Ste. 700
Washington, D.C. 20005
Telephone (202) 371-8850
January 27, 1998

[Check No. 27066]

METHOD AND DEVICE FOR GENERATING CONSTANT VOLTAGE

CROSS REFERENCE TO RELATED APPLICATION

This application claims the priority of Application No. H09-063031, filed March 17, 1997 in Japan, the subject matter of which is incorporated herein by reference.

TECHNICAL FIELD OF THE INVENTION

The present invention relates to a method and a device for generating a constant voltage, and more particularly to a method and a device for generating a constant voltage that is useful to a DRAM (Dynamic Random Access Memory).

BACKGROUND OF THE INVENTION

In general, a constant voltage generation device is designed to include a reference voltage generator, a differential amplifier and an output circuit. The reference voltage generator generates a reference voltage of a predetermined level. The output circuit generates an output voltage, which is controlled to be constant. The differential amplifier is supplied with the reference voltage and the output voltage to provide the difference between them. In response to the output signal of the differential amplifier, the output circuit is controlled to output a constant output voltage.

In such a constant voltage generation device, some noises may be entered into the reference voltage and makes problems. Especially, if short wave noises are successively entered into the reference voltage, the output voltage is oscillated.

OBJECTS OF THE INVENTION

Accordingly, an object of the invention is to provide a method for generating a constant voltage that reduces an effect of short wave noises.

Another object of the invention is to provide a constant voltage generation device that reduces an effect of short wave noises.

Additional objects, advantages and novel features of the invention will be set forth in part in the description that follows, and in part will become apparent to those skilled in the art upon examination of the following or may be learned by practice of the invention. The objects and advantages of the invention may be realized and attained by means of the instrumentalities and combinations particularly pointed out in the appended claims.

SUMMARY OF THE INVENTION

According to a first aspect of the invention, a method for generating a constant voltage includes the steps of: generating a reference voltage; removing short wave noises from the reference voltage; generating an output voltage; generating a control signal based on the reference voltage and the output voltage; and controlling the output voltage in response to the

control signal to provide a constant output voltage.

According to a second aspect of the invention, a method for generating a constant voltage includes the steps of: generating a reference voltage; generating an output voltage; generating a control signal based on the reference voltage and the output voltage; and removing short wave noises from the control signal to provide a second control signal; controlling the output voltage in response to the second control signal to provide a constant output voltage.

According to a third aspect of the invention, a method for generating a constant voltage includes the steps of: generating a reference voltage; generating an output voltage; extracting short wave noises from the reference voltage; supplying the extracted noises into the output voltage; generating a control signal based on the reference voltage and the output voltage; and controlling the output voltage in response to the control signal to provide a constant output voltage.

According to a fourth aspect of the invention, a constant voltage generation device includes a reference voltage generation circuit which generates a reference voltage; an output circuit which generates an output voltage; a differential amplifier which generates a control signal based on the reference voltage and the output voltage; and a noise control circuit which cuts off short wave noises from the reference voltage, to be supplied to the differential amplifier. The output voltage is controlled in response to the control signal to provide a constant output voltage.

According to a fifth aspect of the invention, a constant voltage

generation device includes a reference voltage generation circuit which generates a reference voltage; an output circuit which generates an output voltage; a differential amplifier which generates a control signal based on the reference voltage and the output voltage; and a noise control circuit which cuts off short wave noises from the control signal to provide a second control signal. The output voltage is controlled in response to the second control signal to provide a constant output voltage.

According to a sixth aspect of the invention, a constant voltage generation device includes a reference voltage generation circuit which generates a reference voltage; an output circuit which generates an output voltage; a differential amplifier which generates a control signal based on the reference voltage and the output voltage; and a noise control circuit. The noise control circuit extracts short wave noises from the reference voltage, to be supplied to a first input terminal of the differential amplifier, and supplies the extracted noises into the output voltage, to be supplied to a second input terminal of the differential amplifier. The output voltage is controlled in level in response to the control signal to provide a constant output voltage.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a circuit diagram illustrating a constant voltage generation device according to a conventional technology.

Figs. 2 to 4 are timing charts showing the operation of the constant voltage generation device, shown in Fig. 1.

Fig. 5 is a circuit diagram illustrating a constant voltage generation device according to a first preferred embodiment of the invention.

Figs. 6 and 7 are timing charts showing the operation of the constant voltage generation device, shown in Fig. 5.

Fig. 8 is a circuit diagram illustrating a constant voltage generation device according to a second preferred embodiment of the invention.

Fig. 9 is a circuit diagram illustrating a constant voltage generation device according to a third preferred embodiment of the invention.

Fig. 10 is a circuit diagram illustrating a constant voltage generation device according to a fourth preferred embodiment of the invention.

Fig. 11 is a circuit diagram illustrating a constant voltage generation device according to a fifth preferred embodiment of the invention.

Figs. 12 and 13 are timing charts showing the operation of the constant voltage generation device, shown in Fig. 11.

Fig. 14 is a circuit diagram illustrating a constant voltage generation device according to a sixth preferred embodiment of the invention.

Fig. 15 is a circuit diagram illustrating a constant voltage generation device according to a seventh preferred embodiment of the invention.

invention.

Figs. 16 to 18 are circuit diagrams each illustrating a modified example of a low-pass filter, used in the invention.

DETAILED DISCLOSURE OF THE INVENTION

For better understanding of the invention, background technology is first described. Fig. 1 shows a conventional device for generating a constant voltage, which includes a reference voltage generator A1, a differential amplifier A2, a negative feedback circuit A3 and an output circuit A4. The reference voltage generator A1 generates a predetermined reference voltage V_{ref} and supplies it to a sixth node N_{ref} . The differential amplifier A2 detects the difference between the reference voltage V_{ref} and a feedback voltage $V3$ from the negative feedback circuit A3, and amplifies the difference to generate an output signal (control signal) $V2$. The negative feedback circuit A3 divides an output voltage V_{out} of the output circuit A4 and supplies the divided voltage to an input terminal of the differential amplifier A2. The output circuit A4 generates the output voltage V_{out} in response to the control signal $V2$ at a node $N2$, supplied from the differential amplifier A2. The output voltage V_{out} is supplied to an output node N_{out} .

In the device, if the feedback voltage (divided voltage) $V3$ is lower than the reference voltage V_{ref} , the output voltage V_{out} is controlled to go up. On the other hand, if the feedback voltage (divided voltage) $V3$ is higher than the reference voltage V_{ref} , the output voltage V_{out} is controlled to go

down. Thus, the output voltage V_{out} is controlled to meet the following equation:

$$V_{out} = V_{ref} * (R2 + R3) / R3$$

The differential amplifier A2 includes PMOS transistors MP1 and MP2, forming a current mirror circuit, NMOS transistors MN1 and MN2 and a constant current source CS1. The PMOS transistor MP1 is connected at gate and drain to a first node N1, and at a source to a power supply (V_{cc}). The PMOS transistor MP2 is connected at a gate to the first node N1, at a drain to a second node N2 and at a source to the power supply (V_{cc}).

The NMOS transistor MN1 is connected at a gate to a third node, at a drain to the first node N1 and at a source to a fourth node N4. NMOS transistor MN2 is connected at a gate to the sixth node N_{ref} at a drain to the second node and at a source to the forth node N4. The constant current source CS1 is connected between the fourth node N4 and the ground (V_{ss})

The negative feedback circuit A3 includes resistors R2 and R3 serially connected between the output node N_{out} and the ground V_{ss} . The voltage V3 is generated at the third node N3, located between the resistors R2 and R3. In other words, the negative feedback circuit A3 generate the voltage V3 in accordance with the following equation:

$$V3 = V_{out} * R3 / (R2 + R3)$$

The output circuit A4 includes a PMOS transistor MP3, a

constant current source CS2 and a capacitor C1. The PMOS transistor MP3 is connected at a gate to the second node N2, at a drain to the output node N_{out} and at a source to the power supply V_{cc} . The constant current source CS2 is connected between the output node N_{out} and the ground V_{ss} . The capacitor C1 is connected between the second node N2 and the output node N_{out} .

According to the above mentioned conventional device, if noises having a wavelength shorter than the operation frequency of the reference voltage generator A1 are added to the reference voltage V_{ref} , the output voltage V_{out} may be oscillated.

Fig. 2 shows the variations of the voltages of V_{ref} , V1, V2, V3 and V_{out} in the case where intermittent long wave noises are added to the reference voltage V_{ref} . At a time T0, the voltage V1 at the first node N1 is " $V_{cc} - V_{tp} - \alpha$," where V_{tp} is the threshold voltage of each PMOS transistor. The voltage V2 at the second node N2 is also " $V_{cc} - V_{tp} - \alpha$." The voltage V3 at the third node N3 is V_{ref} and the output voltage V_{out} at the output node N_{out} is " $V_{ref} * (R2 + R3) / R3$."

At a time T1, the reference voltage V_{ref} start rising in response to a noise, so that the following phenomenon occurs: Current flowing through the NMOS transistor MN2 and the second node N2 to the ground V_{ss} is increased.

At a time T2, the current, flowing from the second node to the ground, is further increased, so that the voltage V2 at the second node N2 is lowered. As a result, current flowing from the power supply V_{cc} through

the PMOS transistor MP3 to the output node N_{out} is increased. In this case, the voltage V_2 at the second node N_2 goes down at a speed depending on the capacity of the first capacitor C_1 . Namely, when the capacity of the first capacitor C_1 is large, the voltage V_2 goes down. On the other hand, when the capacity of the first capacitor C_1 is small, the voltage V_2 goes down quickly.

At a time T_3 , current flowing from the power supply V_{cc} to the output node N_{out} is increased, so that the output voltage V_{out} at the output node N_{out} goes up. The output voltage V_{out} goes up until the voltage V_3 at the third node $N_3 (= V_{out} * R_3 / (R_2 + R_3))$ becomes equal to the reference voltage V_{ref} .

At a time T_4 , when the reference voltage V_{ref} begins going down, the differential amplifier A2 and the negative feedback circuit A3 operate in the opposite manner as at the time T_1 , so that the output voltage V_{out} and the voltage V_3 begins going down. Those voltages are eventually stable. As mentioned above, when the voltage changes due to noises in a relatively long period, the output voltage V_{out} follows the variations of the reference voltage V_{ref} . As a result, the output voltage V_{out} changes in level in synchronization with the variations of noises.

Fig. 3 shows the variations of the voltages V_{ref} , V_1 , V_2 , V_3 and V_{out} in the case where intermittent short wave noises are added to the reference voltage V_{ref} . It is assumed that the reference voltage V_{ref} begins going down at a time T_4 , which is the same time or earlier than a time T_3 , at which the voltage V_3 at the third node N_3 begins rising. The time T_3 my shift

depending on the falling speed of the voltage V_2 at the node N_2 , that is, depending on the capacity of the first capacitor C_1 . The wavelength of a noise added to the reference voltage V_{ref} can be shortened independently from the capacity of the first capacitor C_1 , so that the time T_4 can be happened at the same time or earlier than the time T_3 .

The short wave noises mean, in this description, that noises makes the situation in which the time T_4 happens at the same time or earlier than the time T_3 . In Fig. 3, the time T_4 happens at the same time as the time T_3 . In the chart shown in Fig. 3, the operation of the device until the time T_3 is the same as that in Fig. 2, therefore, the same description is not repeated in here.

At a time T_5 , when the voltage V_3 at the third node N_3 goes up, current flowing from the first node N_1 through the NMOS transistor MN_1 , whose gate is connected to the third node N_3 , to the ground V_{ss} is decreased.

In response to the decrease of current flowing from the first node N_1 to the ground, the voltage V_1 at the node N_1 goes down at a time T_6 . Therefore, current flowing from the power supply V_{cc} through the PMOS transistor MP_1 to the first node N_1 is increased, and current flowing from the power supply V_{cc} through the PMOS transistor MP_2 to the second node N_2 is also increased. On the other hand, when the current flowing from the second node N_2 to the ground V_{ss} is decreased, the voltage V_2 at the second node N_2 goes up, and current flowing from the power supply V_{cc} through the PMOS transistor MP_3 to the output node N_{out} is decreased.

When the current flowing from the power supply V_{cc} to the first

node N1 is increased, the voltage V1 at the first node N1 stops going down at a time T7. In response to the increase of the current flowing from the power supply V_{cc} to the second node N2, the voltage V2 at the second node N2 goes more up. In response to the rise of the voltage V2 at the second node N2, the current flowing from the power supply V_{cc} through the PMOS transistor MP3 to the output node N_{out} is further decreased. In response to the decrease of the current flowing from the power supply V_{cc} to the output node N_{out} , the voltages V_{out} and V3 at the output node N_{out} and the third node N3 go down. In response to the fall of the voltage V3 at the third node, current flowing from the first node N1 through the NMOS transistor MN1 to the ground is decreased.

In response to the decrease of current flowing from the power supply V_{cc} to the output node N_{out} at the time T7, the voltages V_{out} and V3 at the output node N_{out} and the third node N3 further go down at a time T8. In response to the fall of the voltage V3 at the third node N3, the current flowing from the first node N1 through the NMOS transistor MN1 to the ground V_{ss} is further decreased. In response to the decrease of current flowing from the first node to the ground V_{ss} , the voltage V1 at the first node N1 goes up. When the voltage V1 at the first node N1 goes up, current flowing from the power supply V_{cc} through the PMOS transistor MP1 to the first node N1 is decreased, and also current flowing from the power supply V_{cc} through the PMOS transistor MP2 to the second node N2 is decreased as well.

In response to the decrease of current flowing from the power

supply V_{cc} to the second node N2, the voltage V2 at the second node N2 goes down, at a time T9. The fall of the voltage V2 causes that current flowing from the power supply V_{cc} through the PMOS transistor MP3 to the output node N_{out} be increased. In response to the decrease of current flowing from the power supply V_{cc} to the first node N1, at the time T8, the voltage V1 at the first node N1 stops going up once, then goes up again in response to the decrease of current flowing from the first node N1 to the ground V_{ss} . In response to the rise of the voltage V1 at the first node N1, current flowing through from the power supply V_{cc} through the PMOS transistor MP1 to the first node N1 is further decreased, also current flowing from the power supply V_{cc} through the PMOS transistor MP2 to the second node N2 is further decreased as well.

At a time T10, voltages V_{out} and V3 at the output node N_{out} and the third node N3 go up in response to the increase of current flowing from the power supply V_{cc} to the output node N_{out} . When the voltage V3 at the third node N3 goes up, current flowing from the first node N1 through the NMOS transistor MN1 to the ground V_{ss} is increased. When current flowing from the power supply V_{ss} to the first node N1 is decreased, the voltage V1 at the first node N1 stops going up. In response to the decrease of current flowing from the power supply V_{cc} to the second node N2, the voltage V2 at the second node N2 further goes down. If the voltage drop at the second node N2 at the time T10 becomes larger than that at the time T2, the potential (voltage) amplitude is enlarged gradually after the time T2. As a result, the output voltage V_{out} at the output node N_{out} is oscillated, as shown in Fig.

3.

For avoiding the above described oscillation of the output voltage V_{out} , the capacity of the first capacitor C1 can be increased to increase discharge current (charge current) of the first capacitor C1, which occurs at the output node N_{out} in response to the rise (fall) of the voltage V2 at the second node N2.

In this case, if short wave noises are involved in the reference voltage V_{ref} , the discharge current (charge current) of the first capacitor C1 is getting larger. Accordingly, when such short wave noises are added to the reference voltage V_{ref} , the increase (decrease) of the current flowing from the power supply V_{cc} to the power potential is compensated by the discharge current (charge current) of the first capacitor C1. As a result, rise (fall) of the voltage V2 at the second node N2, which happens in response to the rise (fall) of the output voltage V_{out} at the output node N_{out} , is prevented. And therefore, the oscillation at the output node N_{out} can be prevented.

Even if the capacity of the first capacitor C1 is increased, the following problems arise if short wave noises are added to the reference voltage V_{ref} :

Fig. 4 shows the voltages V_{ref} , V1, V2, V3 and V_{out} which change in level when short wave noises are successively added to the reference voltage V_{ref} .

At a time T1, when the reference voltage V_{ref} goes up, current flowing from the second node N2 through the NMOS transistor MN2 to the ground V_{ss} is increased.

In response to the increase of the current, flowing from the second node N2 to the ground V_{ss} , the voltage V2 at the second node N2 goes down, and current flowing from the power supply V_{cc} through PMOS transistor MP3 to the output node N_{out} is increased, at a time T2. In response to the fall of the voltage V2 at the second node N2, charge current flowing from the output node N_{out} to the first capacitor C1 is generated.

At a time T3, the output voltage V_{out} at the output node N_{out} and the voltage V3 at the third node N3 go up, in response to the increase of current flowing from the power supply V_{cc} through the PMOS transistor MP3 to the output node N_{out} . At this time, the voltages go up just a little at the output node N_{out} and at the third node N3 in the case where the capacity of the first capacitor C1 is large. The voltage rise is very small relative to that in the case where the capacity of the first capacitor C1 is small, because the charge current flows from the output node N_{out} to the first capacitor C1. Therefore, the increase of current flowing from the first node N1 through the NMOS transistor MN1 to the ground V_{ss} becomes very small. In addition, increase and decrease of current flowing at the following time T4 and T5 are also very small.

At the time T4, the voltage V1 at the first node N1 goes down in response to the increase of current flowing from the first node N1 to the ground V_{ss} , and therefore, current flowing from the power supply V_{cc} through the PMOS transistor MP2 to the second node N2 is increased.

At the time T5, the voltage V2 at the second node N2 goes up in response to the increase of current flowing from the power supply V_{cc} to the

second node N2. The voltage V2 at the second node N2 goes up slowly, because the increase of the current flowing from the power supply V_{cc} to the second node N2 is very small. For that reason, if the short wave noises are added successively to the reference voltage V_{ref} , the reference voltage V_{ref} may start going up again before the voltage at the second node N2 returns to the level at the time T1. If the above described operation is repeated, the voltage V2 at the second node N2 goes down to a level lower than that at the time T0, and the output voltage V_{out} at the output node N_{out} goes up. Consequently, the output voltage V_{out} is oscillated.

Fig. 5 shows a constant voltage generation device, according to a first preferred embodiment of the invention. In this embodiment, the same or corresponding components to those in the device shown in Fig. 1 are represented by the same symbols. In addition, detailed description of the same components are not repeated here in the first preferred embodiment to avoid redundant description. The constant voltage generation device of the first preferred embodiment includes a reference voltage generator A1, a differential amplifier A2, a negative feedback circuit A3, an output circuit A4 and a low-pass filter A5.

The reference voltage generator A1 generates a predetermined reference voltage V_{ref} and supplies it to a sixth node N_{ref} . The differential amplifier A2 detects the difference between the reference voltage V_{ref} and a feedback voltage V3 from the negative feedback circuit A3, and amplifies the difference to generate an output signal (control signal) V2. The negative feedback circuit A3 divides an output voltage V_{out} of the output

circuit A4 and supplies the divided voltage to an input terminal of the differential amplifier A2. The output circuit A4 generates the output voltage V_{out} in response to the control signal V2 at a node N2, supplied from the differential amplifier A2. The output voltage V_{out} is supplied to an output node N_{out} .

The low-pass filter A5 includes a resistor R4, which is serially connected between the sixth node N_{ref} and the fifth node N5, and a capacitor C2, which is connected to the fifth node N5 and the ground V_{ss} . Other types of low-pass filters are applicable to the invention.

Now, operation of the device according to the first preferred embodiment, in the case where no noise is added to the reference voltage V_{ref} , is first described. The differential amplifier A2 detects the voltage difference between the reference voltage V_{ref} supplied from the reference voltage generator A1, and the feedback voltage V3, which is generated by resistor-dividing the output voltage V_{out} at the output node N_{out} . When the feedback voltage V3 is lower than the reference voltage V_{ref} ($V3 < V_{ref}$), the gate voltage of the PMOS transistor MP3 goes down to increase the output voltage V_{out} . On the other hand, when the feedback voltage V3 is higher than the reference voltage V_{ref} ($V3 > V_{ref}$), the gate voltage of the PMOS transistor MP3 goes up to decrease the output voltage V_{out} . As a result, the output voltage V_{out} at the output node N_{out} is controlled to be a constant value of " $V_{ref} * (R2 + R3) / R3$ ".

Next, operation of the device according to the first preferred embodiment, in the case where long wave noises are intermittently added to

the reference voltage V_{ref} is described in conjunction with Fig. 6. At a time T1, when the reference voltage V_{ref} starts going up gradually in response to the noises, current is generated based on the voltage difference between the reference voltage V_{ref} and a voltage at the fifth node N5. The current start flowing from the resistor R4 to the fifth node N5. The current is used for charging the second capacitor C2, because of the long wavelength.

At a time T2, in response to the charge of the second capacitor C2, the voltage V5 at the fifth node N5 start going up. The rising speed of the voltage V5 depends on a time constant τ that is defined by the resistance of the resistor R4 and the capacity of the second capacitor C2.

When the voltage V5 at the fifth node N5 starts going up, the voltage difference is made between the voltage V3 at the third node N3 and the voltage V5 at the fifth node N5. In proportional to the voltage difference, current flowing from the second node N2 through the NMOS transistor MN2 to the ground V_{ss} is increased. As a result, the voltage V2 at the second node N2 goes down, and current flowing from the power supply V_{cc} through the PMOS transistor MP3, whose gate is connected to the second node N2, to the output node N_{out} is increased. The voltage V2 at the second node N2 goes down at a speed depending on the capacity of the first capacitor C1. That is, the speed becomes slower if the capacity of the first capacitor C1 is large, while the speed becomes faster if the capacity of the first capacitor C1 is small.

When current, flowing from the power supply V_{cc} to the output node N_{out} is increased, the output voltage V_{out} at the output node N_{out} goes

up. At the same time, the voltage $V3 (= V_{out} * R3 / (R2 + R3))$, to be applied through the negative feedback circuit A3 to the third node N3, starts going up. The voltage $V3$ at the third node N3 goes up so as to be equal to the voltage $V5$ at the fifth node N5. The current flowing from the PMOS transistor MP3 to the output node N_{out} is eventually saturated, so that the output voltage V_{out} at the output node N_{out} keeps a predetermined voltage.

At a time T3, the reference voltage V_{ref} start going down. In response to the fall of the reference voltage V_{ref} the voltage $V5$ at the fifth node N5 becomes higher than the reference voltage V_{ref} , and therefore, charge current of the second capacitor C2 start flowing from the fifth node N5 to the sixth node N_{ref} .

At a time T4, the voltage $V5$ at the fifth node N5 start going down. As mentioned above, the falling speed depends on a time constant τ that is defined by the resistance of the resistor R4 and the capacity of the second capacitor C2. When the capacity of the second capacitor C2 or the resistance of the resistor R4 is large, the speed of falling becomes slower. On the other hand, when both the capacity of the second capacitor C2 and the resistance of the resistor R4 are small, the speed of falling becomes faster.

As described before, when long wave noises are added to the reference voltage V_{ref} the variations of the reference voltage V_{ref} is transferred through the low-pass filter A5 to the fifth node N5. As a result, the output voltage V_{out} at the output node N_{out} only changes slowly (gradually), and the change happens temporarily but not successively.

Next, operation of the device according to the first preferred embodiment, in the case where short wave noises are intermittently added to the reference voltage V_{ref} , is described in conjunction with Fig. 7. In this case, variations of the reference voltage V_{ref} due to the short wave noises can not pass through the low-pass filter A5. In other words, even if the reference voltage V_{ref} changes in level, the voltage V5 at the fifth node N5 keeps being constant.

As a result, all the voltages V1, V2, V3 and V_{out} at the first, second, third and output nodes N1, N2, N3 and N_{out} can be maintained to be constant. Oscillation or other problems do not occur on the output voltage V_{out} at the output node N_{out} .

Next, operation of the device according to the first preferred embodiment, in the case where short wave noises are successively added to the reference voltage V_{ref} , is described. According to the before described conventional device, the problems due to successively entering short wave noises, such as oscillation, can not be solved. In contrast, according to the first preferred embodiment, even if short wave noises are successively added to the reference voltage V_{ref} , the effect of the noises are shut out by the low-pass filter A5, so that the voltage V5 at the fifth node N5 can be maintained being constant.

As a result, all the voltages V1, V2, V3 and V_{out} at the first, second, third and output nodes N1, N2, N3 and N_{out} can be maintained to be constant. Oscillation or other problems do not occur on the output voltage V_{out} at the output node N_{out} .

As described above, according to the first preferred embodiment, the low-pass filter A5 is provided between the reference voltage generator A1 and the differential amplifier A2, so that voltage variations due to the short wave noises is not transferred to the input terminal of the differential amplifier A2. As a result, oscillation and voltage variations of the output voltage V_{out} at the output node N_{out} can be effectively avoided, and therefore, the output voltage V_{out} is maintained being constant.

Fig. 8 shows a constant voltage generation device, according to a second preferred embodiment of the invention. In this embodiment, the same or corresponding components to those in the devices shown in Figs. 1 and 5 are represented by the same symbols. In addition, detailed description of the same components are not repeated here in the second preferred embodiment to avoid redundant description. The constant voltage generation device of this embodiment includes a reference voltage generator A1, a differential amplifier A2, a negative feedback circuit A3, an output circuit A4 and a low-pass filter A5.

The reference voltage generator A1 generates a predetermined reference voltage V_{ref} and supplies it to a sixth node N_{ref} . The differential amplifier A2 detects the difference between the reference voltage V_{ref} and a feedback voltage V3 from the negative feedback circuit A3, and amplifies the difference to generate an output signal (control signal) V2. The negative feedback circuit A3 divides an output voltage V_{out} of the output circuit A4 and supplies the divided voltage to an input terminal of the differential amplifier A2. The output circuit A4 generates the output

voltage V_{out} in response to the control signal V2 at a node N2, supplied from the differential amplifier A2. The output voltage V_{out} is supplied to an output node N_{out} .

The low-pass filter A5 includes an NMOS transistor MN8, which is serially connected between the sixth node N_{ref} and the fifth node N5, and a capacitor C2, which is connected to the fifth node N5 and the ground V_{ss} . The difference between the first and second preferred embodiments is the components of the low-pass filter A5. The operation of the second preferred embodiment is almost the same as that of the first preferred embodiment, shown in Fig. 5.

Fig. 9 shows a constant voltage generation device, according to a third preferred embodiment of the invention. In this embodiment, the same or corresponding components to those in the devices shown in Figs. 1, 5 and 8 are represented by the same symbols. In addition, detailed description of the same components are not repeated here in this embodiment to avoid redundant description. The constant voltage generation device of this embodiment includes a reference voltage generator A1, a differential amplifier A2, a negative feedback circuit A3, an output circuit A4 and a low-pass filter A6.

The reference voltage generator A1 generates a predetermined reference voltage V_{ref} and supplies it to a sixth node N_{ref} . The differential amplifier A2 detects the difference between the reference voltage V_{ref} and a feedback voltage V3 from the negative feedback circuit A3, and amplifies the difference to generate an output signal (control signal) V2. The

negative feedback circuit A3 divides an output voltage V_{out} of the output circuit A4 and supplies the divided voltage to an input terminal of the differential amplifier A2. The output circuit A4 generates the output voltage V_{out} in response to the control signal V2 at a node N2, supplied from the differential amplifier A2. The output voltage V_{out} is supplied to an output node N_{out} .

The low-pass filter A6 includes a resistor R6, which is serially connected between the second node N2 and the output circuit A4, and a capacitor C4, which is connected to the second node N5 and the ground V_{ss} . The difference between the first and third preferred embodiments is the arrangement of the low-pass filter A6. In the third preferred embodiment, the low-pass filter A6 removes (cuts off) short wave noises from a signal (control signal) at the second node N2, which is the output signal of the differential amplifier A2, to generate a second control signal S2 to be supplied to the output circuit A4. The output circuit A4 is controlled with the second control signal S2 to provide a constant output voltage V_{out} at the output node N_{out} .

According to the third preferred embodiment, the low-pass filter A6 is provided between the differential amplifier A2 and the output circuit A4, so that voltage variations due to the short wave noises is not transferred to the input terminal of the output circuit A4, even though the reference voltage V_{ref} involves short wave noises. As a result, oscillation and voltage variations of the output voltage V_{out} at the output node N_{out} can be effectively avoided, and therefore, the output voltage V_{out} is maintained being constant.

Fig. 10 shows a constant voltage generation device, according to a fourth preferred embodiment of the invention. In this embodiment, the same or corresponding components to those in the devices shown in Figs. 1, 5, 8 and 9 are represented by the same symbols. In addition, detailed description of the same components are not repeated here in this embodiment to avoid redundant description. The constant voltage generation device of this embodiment includes a reference voltage generator A1, a differential amplifier A2, a negative feedback circuit A3, an output circuit A4 and a pair of low-pass filters A5 and A6.

The reference voltage generator A1 generates a predetermined reference voltage V_{ref} and supplies it to a sixth node N_{ref} . The differential amplifier A2 detects the difference between the reference voltage V_{ref} and a feedback voltage $V3$ from the negative feedback circuit A3, and amplifies the difference to generate an output signal (control signal) $V2$. The negative feedback circuit A3 divides an output voltage V_{out} of the output circuit A4 and supplies the divided voltage to an input terminal of the differential amplifier A2. The output circuit A4 generates the output voltage V_{out} in response to the control signal $V2$ at a node $N2$, supplied from the differential amplifier A2. The output voltage V_{out} is supplied to an output node N_{out} .

The low-pass filters A5 and A6 are designed and arranged to be the same as those in the first and third preferred embodiment, shown in Figs. 5 and 9, respectively. The low-pass filter A5 is designed to remove (cut off) short wave noises from the reference voltage V_{ref} at the sixth node

N_{ref} to maintain the reference voltage being constant. The low-pass filter A6 is designed to remove (cuts off) short wave noises from a signal (control signal) at the second node N2, which is the output signal of the differential amplifier A2, to generate a second control signal S2 to be supplied to the output circuit A4. The output circuit A4 is controlled with the second control signal S2 to provide a constant output voltage V_{out} at the output node N_{out} .

According to the fourth preferred embodiment, the low-pass filters A5 and A6 are provided between the differential amplifier A2 and the output circuit A4, and between the differential amplifier A2 and the output circuit A4, respectively, so that voltage variations due to the short wave noises is not transferred to the input terminal of the output circuit A4. As a result, oscillation and voltage variations of the output voltage V_{out} at the output node N_{out} can be effectively avoided, and therefore, the output voltage V_{out} is maintained being constant.

Fig. 11 shows a constant voltage generation device, according to a fifth preferred embodiment of the invention. In this embodiment, the same or corresponding components to those in the devices shown in Figs. 1, 5, 8, 9 and 10 are represented by the same symbols. In addition, detailed description of the same components are not repeated here in this embodiment to avoid redundant description. The constant voltage generation device of this embodiment includes a reference voltage generator A1, a differential amplifier A2, a negative feedback circuit A3, an output circuit A4 and a third capacitor C3.

The reference voltage generator A1 generates a predetermined reference voltage V_{ref} and supplies it to a sixth node N_{ref} . The differential amplifier A2 detects the difference between the reference voltage V_{ref} and a feedback voltage V3 from the negative feedback circuit A3, and amplifies the difference to generate an output signal (control signal) V2. The negative feedback circuit A3 divides an output voltage V_{out} of the output circuit A4 and supplies the divided voltage to an input terminal of the differential amplifier A2. The output circuit A4 generates the output voltage V_{out} in response to the control signal V2 at a node N2, supplied from the differential amplifier A2. The output voltage V_{out} is supplied to an output node N_{out} .

The third capacitor C3 is connected to the input terminals of the differential amplifier A2, that is the feature of this embodiment. In other words, the third capacitor C3 is connected between the third node N3 and the sixth node N_{ref} so as to supply voltage-variations due to short wave noises to both the input terminals of the differential amplifier A2.

Now, operation of the device according to the fifth preferred embodiment, in the case where no noise is added to the reference voltage V_{ref} , is first described. The differential amplifier A2 detects the voltage difference between the reference voltage V_{ref} supplied from the reference voltage generator A1, and the feedback voltage V3, which is generated by resistor-dividing the output voltage V_{out} at the output node N_{out} . When the feedback voltage V3 is lower than the reference voltage V_{ref} ($V3 < V_{ref}$), the gate voltage of the PMOS transistor MP3 is decreased to increase the

output voltage V_{out} . On the other hand, when the feedback voltage $V3$ is higher than the reference voltage V_{ref} ($V3 > V_{ref}$), the gate voltage of the PMOS transistor MP3 is increased to decrease the output voltage V_{out} . As a result, the output voltage V_{out} at the output node N_{out} is controlled to be a constant value of " $V_{ref} * (R2 + R3) / R3$ ".

Next, operation of the device according to the fifth preferred embodiment, in the case where long wave noises are intermittently added to the reference voltage V_{ref} , is described in conjunction with Fig. 12. In this case, the voltage variations of the reference voltage V_{ref} is small, so that the third capacitor C3 can be seen as a high-impedance circuit. As a result, charging and discharging current is very small, and therefore, the third capacitor C3 can be seen not to exist in the circuitry.

As shown in Fig. 12, when the reference voltage V_{ref} starts going up in response to the noises, the voltage $V2$ at the second node $N2$ goes down, then the output voltage V_{out} at the output node N_{out} and the voltage $V3$ at the third node $N3$ start going up. However, those kind of voltage variations is temporarily, but not repeated. As a result, the output voltage V_{out} at the output node N_{out} only changes slowly (gradually), and the change happens temporarily but not repeated.

Next, operation of the device according to the fifth preferred embodiment, in the case where short wave noises are intermittently added to the reference voltage V_{ref} , is described in conjunction with Fig. 13. In this embodiment, the third capacitor C3 functions as a low-impedance circuit relative to voltage variations due to the noises, so that large amount

of charge current and discharge current flow through the capacitor C3. Thus, more current (charge current) is flowing through the third capacitor C3 than through the resistor R2, so that the voltage V3 at the third node N3 changes in synchronization with the reference voltage V_{ref} .

When the reference voltage V_{ref} goes up, the voltage V3 at the third node N3 goes up as well in response to the charge current. In contrast, when the reference voltage V_{ref} goes down, the voltage V3 at the third node N3 goes down. The change of situation between the rise and fall of the voltage V3 happens quickly without a time delay, such as for the conventional circuit.

The temporarily decreased (increased) current, flowing through the NMOS transistor MN1 and the PMOS transistors MP1 and MP2, can be controlled to be equal to drain current of the NMOS transistor MN2. As a result, the voltage variations at the second node N2 in response to the rise (fall) of the reference voltage V_{ref} becomes small. When the reference voltage V_{ref} becomes stable, the voltage V2 at the second node N2 becomes as it was before the voltage variations happens. The voltage variations of the output voltage V_{out} at the output node N_{out} does not larger than that of the reference voltage V_{ref} . The voltage variations of the output voltage V_{out} is not repeated.

Next, operation of the device according to the fifth preferred embodiment, in the case where short wave noises are successively added to the reference voltage V_{ref} is described. Basically, the operation in this case is the same as that in the case of intermittent short wave noises. The

variations of the reference voltage V_{ref} is supplied to both the input terminals of the differential amplifier A2 in the common mode, so that the effect of the variations is converged for each wave. As a result, even if the short wave noises are successively added to the reference voltage V_{ref} , the voltages V_{ref} and V3 at the sixth and third nodes N_{ref} and N3 become identical when the voltage variations is end.

As described above, according to the fifth preferred embodiment, the third capacitor C3 is provided between the sixth node N_{ref} and the third node N3, so that variations of the reference voltage V_{ref} due to the short wave noises is transferred to the third node N3 in the common mode. As a result, the voltage V2 at the second node N2 changes in synchronizing with the variations of the reference voltage V_{ref} and therefore, the output voltage V_{out} at the output node N_{out} can be maintained being constant when the variations of the reference voltage is end.

Fig. 14 shows a constant voltage generation device, according to a sixth preferred embodiment of the invention. In this embodiment, the same or corresponding components to those in the devices shown in Figs. 1, 5, 8, 9, 10 and 12 are represented by the same symbols. In addition, detailed description of the same components are not repeated here in this embodiment to avoid redundant description. The constant voltage generation device of this embodiment includes a reference voltage generator A1, a differential amplifier A2, a negative feedback circuit A3, an output circuit A4 and a high-pass filter A7.

The reference voltage generator A1 generates a predetermined

reference voltage V_{ref} and supplies it to a sixth node N_{ref} . The differential amplifier A2 detects the difference between the reference voltage V_{ref} and a feedback voltage V3 from the negative feedback circuit A3, and amplifies the difference to generate an output signal (control signal) V2. The negative feedback circuit A3 divides an output voltage V_{out} of the output circuit A4 and supplies the divided voltage to an input terminal of the differential amplifier A2. The output circuit A4 generates the output voltage V_{out} in response to the control signal V2 at a node N2, supplied from the differential amplifier A2. The output voltage V_{out} is supplied to an output node N_{out} .

The high-pass filter A7 includes a capacitor C7, which is connected to the input terminals of the differential amplifier A2, and a resistor A7, which is connected to the node N3 and the ground V_{ss} .

In the same manner as the fifth preferred embodiment, shown in Fig. 11, variations of the reference voltage V_{ref} due to short wave noises is transferred to the third node N3 in the common mode. As a result, the voltage V2 at the second node N2 changes in synchronizing with the variations of the reference voltage V_{ref} and therefore, the output voltage V_{out} at the output node N_{out} can be maintained being constant when the variations of the reference voltage is end.

Fig. 15 shows a constant voltage generation device, according to a seventh preferred embodiment of the invention. In this embodiment, the same or corresponding components to those in the devices shown in Figs. 1, 5, 8, 9, 10, 12 and 14 are represented by the same symbols. In addition,

detailed description of the same components are not repeated here in this embodiment to avoid redundant description. The constant voltage generation device of this embodiment includes a reference voltage generator A1, a differential amplifier A2, a negative feedback circuit A3, an output circuit A4, a low-pass filter A5 and a capacitor C3.

The reference voltage generator A1 generates a predetermined reference voltage V_{ref} and supplies it to a sixth node N_{ref} . The differential amplifier A2 detects the difference between the reference voltage V_{ref} and a feedback voltage V3 from the negative feedback circuit A3, and amplifies the difference to generate an output signal (control signal) V2. The negative feedback circuit A3 divides an output voltage V_{out} of the output circuit A4 and supplies the divided voltage to an input terminal of the differential amplifier A2. The output circuit A4 generates the output voltage V_{out} in response to the control signal V2 at a node N2, supplied from the differential amplifier A2. The output voltage V_{out} is supplied to an output node N_{out} .

It can be understood that the seventh preferred embodiment, shown in Fig. 15, includes the feature combining the first preferred embodiment and the fifth preferred embodiment shown in Figs. 5 and 11.

According to the seventh preferred embodiment, the low-pass filter A5 is provided between the reference voltage generator A1 and the differential amplifier A2, so that voltage variations due to the short wave noises is not transferred to an input terminal of the differential amplifier A2. In addition, even though short wave noises are added to the reference

voltage V_{ref} variations of the reference voltage V_{ref} due to short wave noises is transferred to the third node N3 in the common mode, because the capacitor C3 is provided between the fifth node N5 and the third node N3. As a result, the voltage V2 at the second node N2 changes in synchronizing with the variations of the reference voltage V_{ref} . Consequently, oscillation and voltage variations of the output voltage V_{out} at the output node N_{out} can be effectively avoided, so that the output voltage V_{out} at the output node N_{out} can be maintained being constant.

It will be understood that the above description of the present invention is susceptible to various modifications, changes and adaptations, and the same are intended to be comprehended with the meaning and range of equivalents of the appended claims.

For example, in the above described first, third, fourth and seventh preferred embodiments, shown in Figs. 5, 9, 10 and 15, the low-pass filter A5 and A6 can be modified to be as shown in Figs. 16 and 17. The low-pass filter, shown in Fig. 16 is composed only of the capacitor C2, while the low-pass filter, shown in Fig. 17, is composed only of the resistor R4. Further, as shown in Fig. 18, the capacitor C2 and the resistor R4 can be of variable type to provide better control of the output voltage V_{out} . In the fifth and seventh preferred embodiments, shown in Figs. 11 and 15, the capacitor C3 can be of variable type to provide better control of the output voltage V_{out} .

In each embodiment, the output voltage V_{out} at the output node N_{out} is divided to generate the voltage V3 in the negative feedback circuit A3,

however, the output voltage V_{out} at the output node N_{out} can be directly applied to the differential amplifier A2. The transistors used in each embodiment can be opposite type between P-channel and N-channel. The transistors used in each embodiment is not limited by MOS type, but can be other types, such as bipolar type.

What is claimed is:

1. A method for generating a constant voltage, comprising the steps of:

generating a reference voltage;

removing short wave noises from the reference voltage;

generating an output voltage;

generating a control signal based on the reference voltage and the output voltage; and

controlling the output voltage in response to the control signal to provide a constant output voltage.

2. A method for generating a constant voltage, comprising the steps of:

generating a reference voltage;

generating an output voltage;

generating a control signal based on the reference voltage and the output voltage; and

removing short wave noises from the control signal to provide a second control signal;

controlling the output voltage in response to the second control signal to provide a constant output voltage.

3. A method for generating a constant voltage, comprising the steps of:

generating a reference voltage;
generating an output voltage;
extracting short wave noises from the reference voltage;
supplying the extracted noises into the output voltage;
generating a control signal based on the reference voltage and the output voltage; and
controlling the output voltage in response to the control signal to provide a constant output voltage.

4. A constant voltage generation device, comprising:
a reference voltage generation circuit which generates a reference voltage;
an output circuit which generates an output voltage;
a differential amplifier which generates a control signal based on the reference voltage and the output voltage; and
a noise control circuit which removes short wave noises from the reference voltage, to be supplied to the differential amplifier, wherein
the output voltage is controlled in response to the control signal to provide a constant output voltage.

5. The constant voltage generation device, according to claim 4, wherein

the noise control circuit comprises a resistor serially connected between the reference voltage generation circuit and a first input terminal of the differential amplifier.

6. The constant voltage generation device, according to claim 5, wherein

the noise control circuit further comprises a capacitor, which is connected at an electrode to a first terminal and at the other electrode to the first input terminal of the differential amplifier.

7. The constant voltage generation device, according to claim 6, wherein

the first terminal is grounded.

8. The constant voltage generation device, according to claim 6, wherein

the capacitor is a variable type of capacitor, and the resistor is a variable type of resistor.

9. The constant voltage generation device, according to claim 4, wherein

the noise control circuit comprises a transistor serially connected at source and drain between the reference voltage generation circuit and a first input terminal of the differential amplifier; and a capacitor connected

at an electrode to the transistor and at the other electrode to the first input terminal of the differential amplifier.

10. A constant voltage generation device, comprising:

a reference voltage generation circuit which generates a reference voltage;

an output circuit which generates an output voltage;

a differential amplifier which generates a control signal based on the reference voltage and the output voltage; and

a noise control circuit which removes short wave noises from the control signal to provide a second control signal, wherein

the output voltage is controlled in response to the second control signal to provide a constant output voltage.

11. The constant voltage generation device, according to claim 10, wherein

the noise control circuit comprises a resistor serially connected between an output terminal of the differential amplifier and an input terminal of the output circuit; and a capacitor connected between a second terminal and the output terminal of the differential amplifier.

12. The constant voltage generation device, according to claim 11, wherein

the second terminal is grounded.

13. A constant voltage generation device, comprising:

- a reference voltage generation circuit which generates a reference voltage;
- an output circuit which generates an output voltage;
- a differential amplifier which generates a control signal based on the reference voltage and the output voltage; and
- a first noise control circuit which removes short wave noises from the reference voltage; and
- a second noise control circuit which removes short wave noises from the control signal to provide a second control signal, wherein the output voltage is controlled in response to the second control signal to provide a constant output voltage.

14. The constant voltage generation device, according to claim 13, wherein

the first noise control circuit comprises a first resistor serially connected between the reference voltage generation circuit and a first input terminal of the differential amplifier; and a first capacitor connected between a first terminal and the first input terminal of the differential amplifier; and

the second noise control circuit comprises a second resistor serially connected between an output terminal of the differential amplifier and an input terminal of the output circuit; and a second capacitor connected between a second terminal and the output terminal of the differential

amplifier.

15. The constant voltage generation device, according to claim 14, wherein

each of the first and second terminals is grounded.

16. A constant voltage generation device, comprising:
a reference voltage generation circuit which generates a reference voltage;

an output circuit which generates an output voltage;

a differential amplifier which generates a control signal based on the reference voltage and the output voltage; and

a noise control circuit which extracts short wave noises from the reference voltage, to be supplied to a first input terminal of the differential amplifier, and supplies the extracted noises into the output voltage, to be supplied to a second input terminal of the differential amplifier, wherein

the output voltage is controlled in level in response to the control signal to provide a constant output voltage.

17. The constant voltage generation device, according to claim 16, wherein

the noise control circuit comprises a capacitor connected between the first input terminal and the second input terminal of the differential amplifier so that an effect of the short wave noises is cancelled.

18. The constant voltage generation device, according to claim 16, wherein

the noise control circuit is a high-pass filter, which is connected between the first and second input terminals of the differential amplifier.

19. The constant voltage generation device, according to claim 16, further comprising:

a second noise control circuit which removes short wave noises from the reference voltage.

ABSTRACT OF THE DISCLOSURE

In a method for generating a constant voltage, a reference voltage is generated. Short wave noises are cut off from the reference voltage. A control signal is generated based on the reference voltage and an output voltage. The output voltage is controlled in response to the control signal to provide a constant output voltage.

FIG. 1

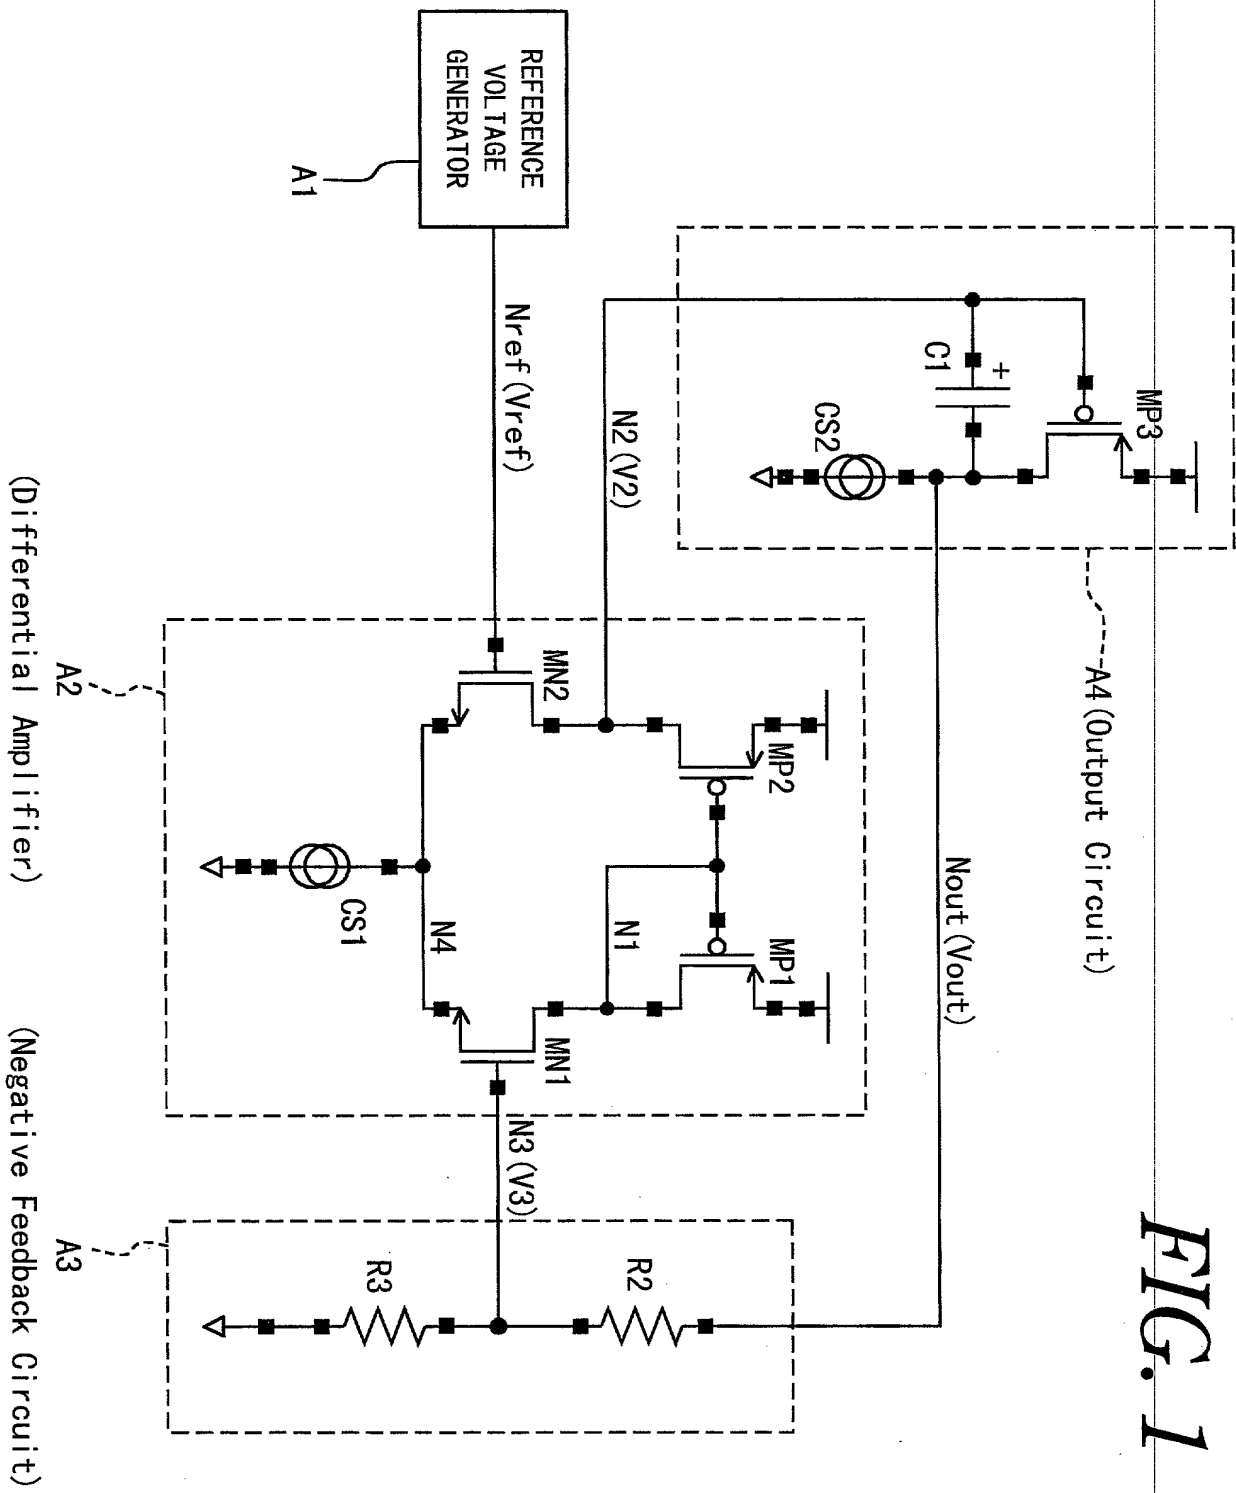


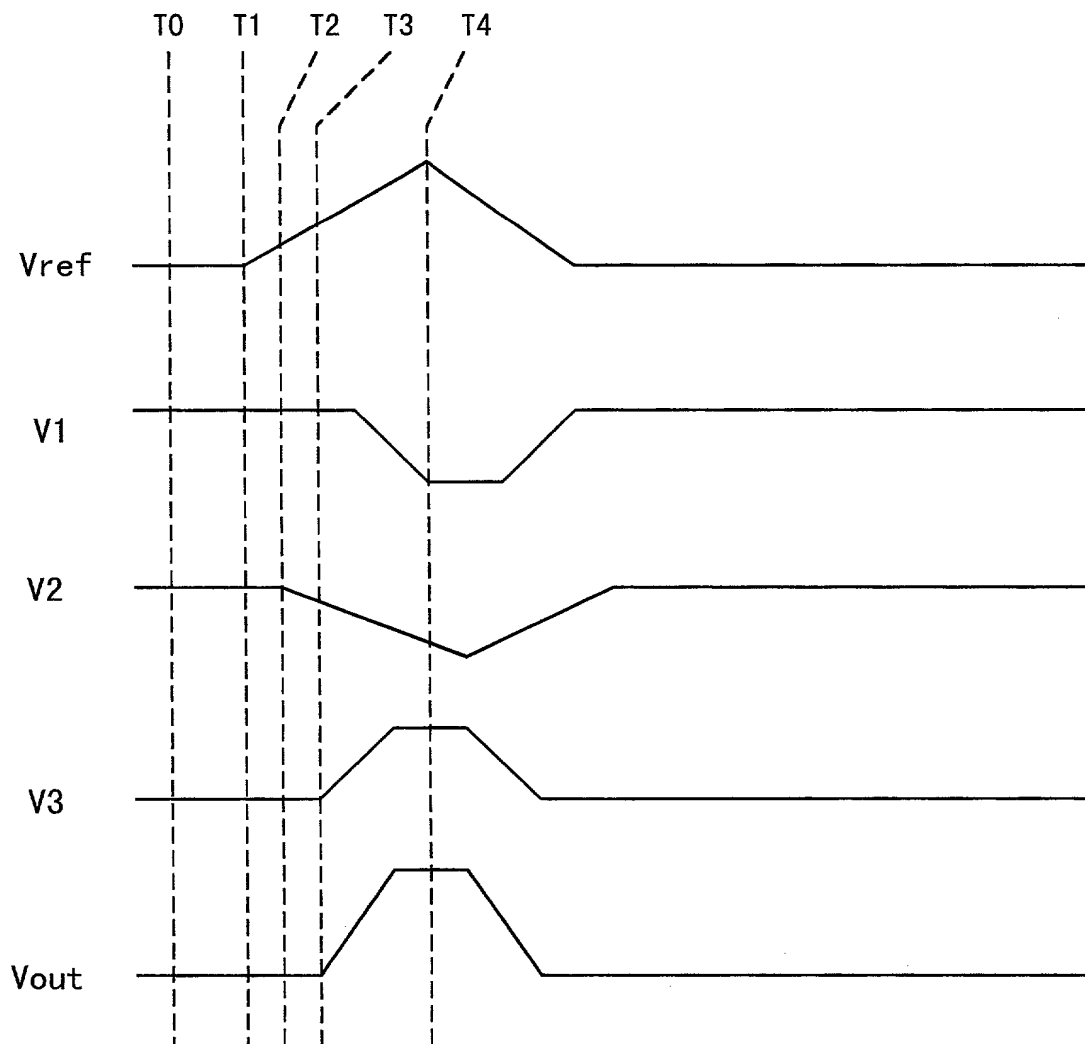
FIG. 2

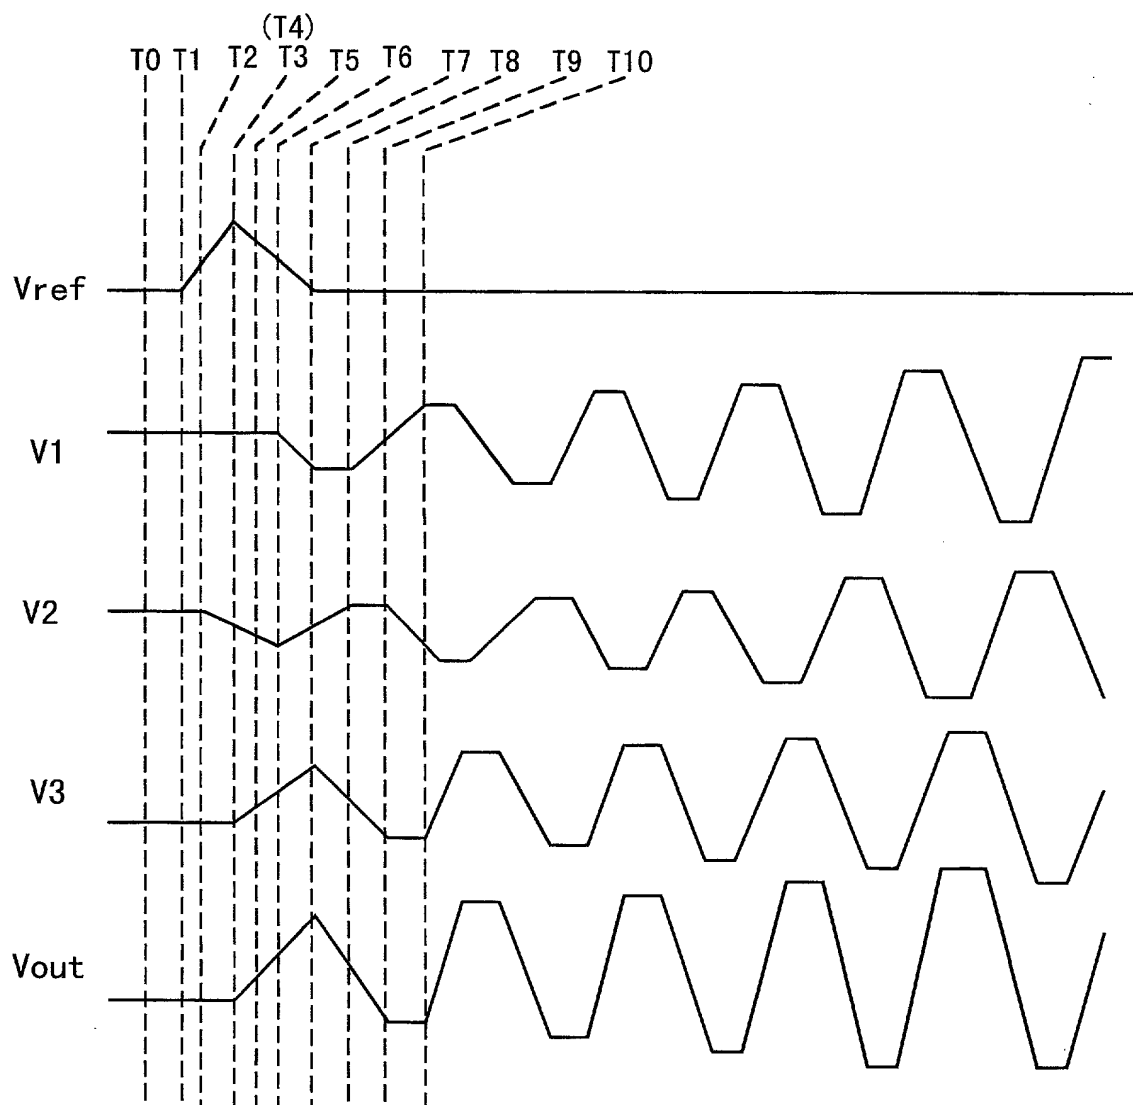
FIG. 3

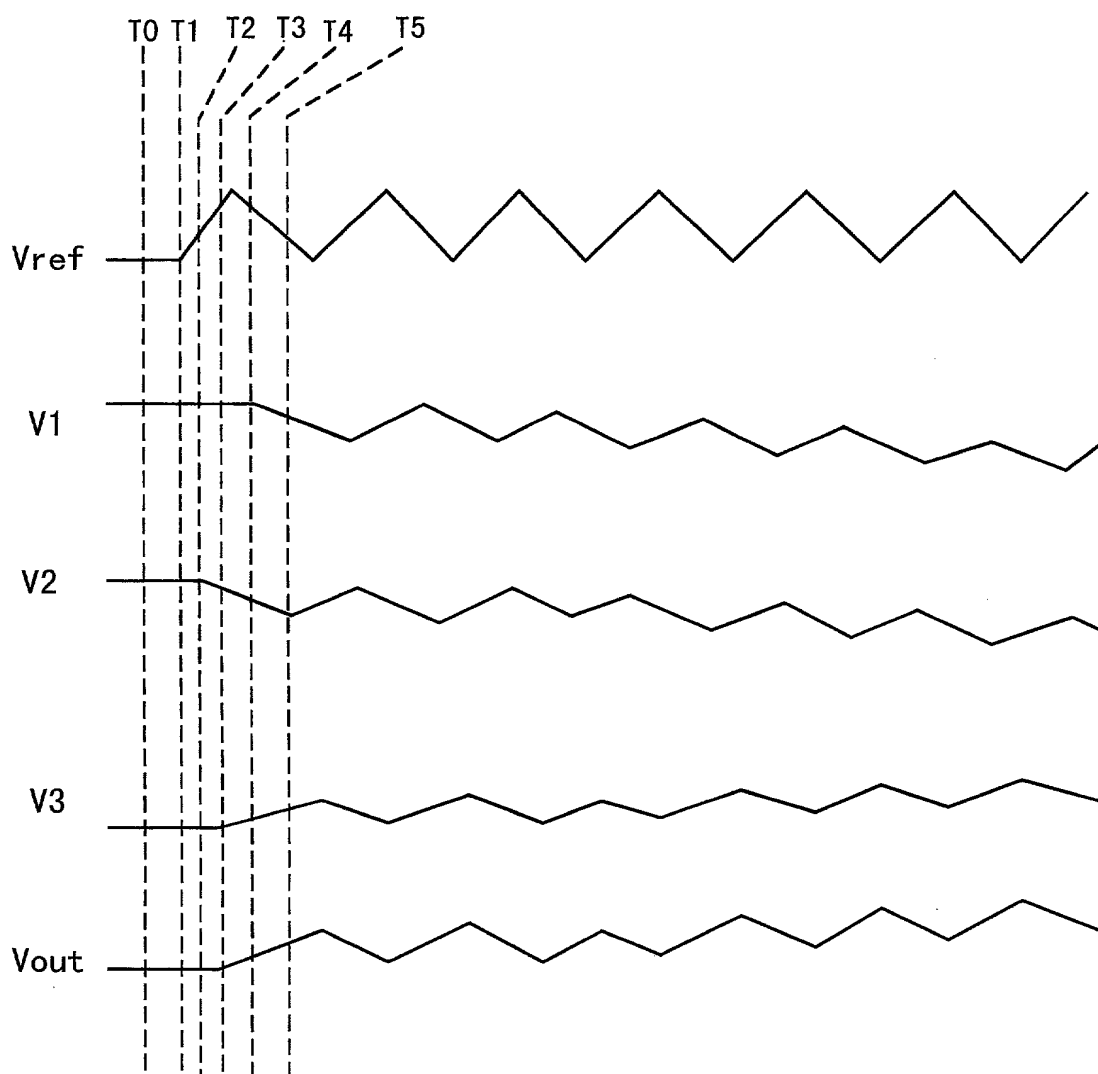
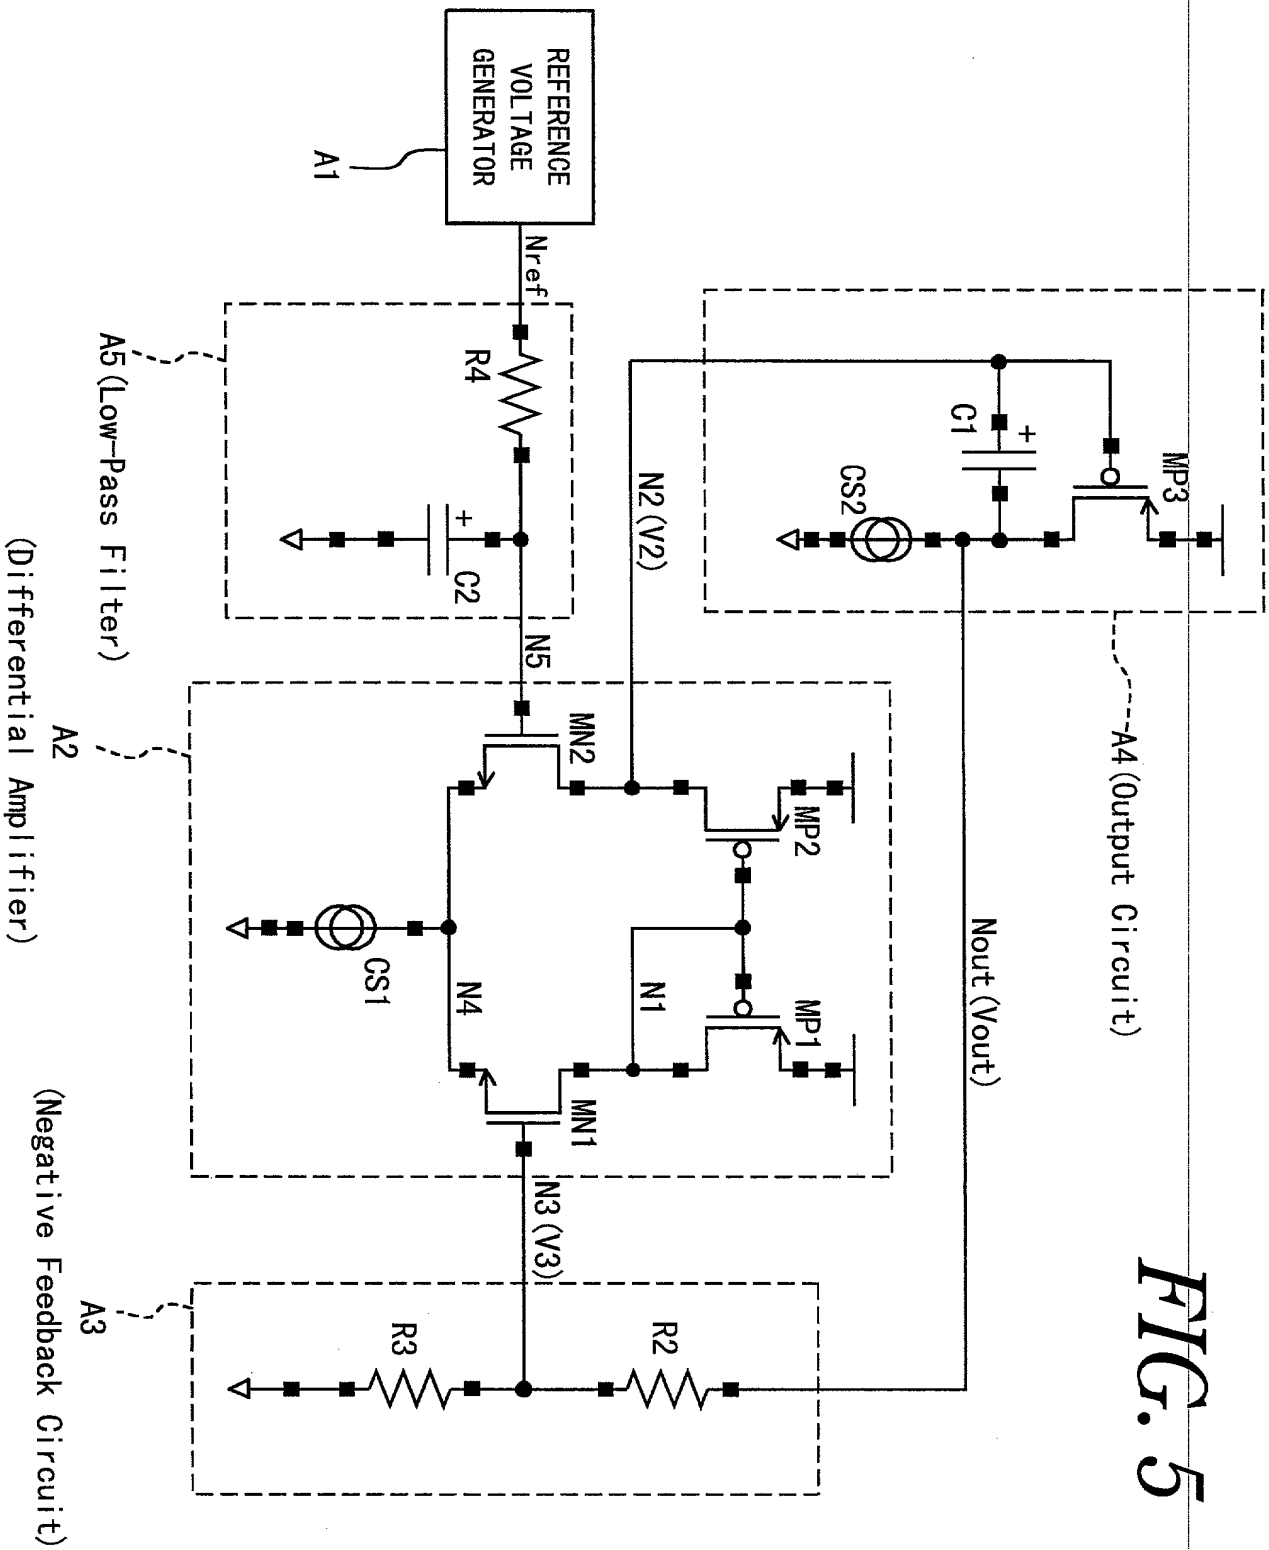
FIG. 4

FIG. 5



09014401.012798

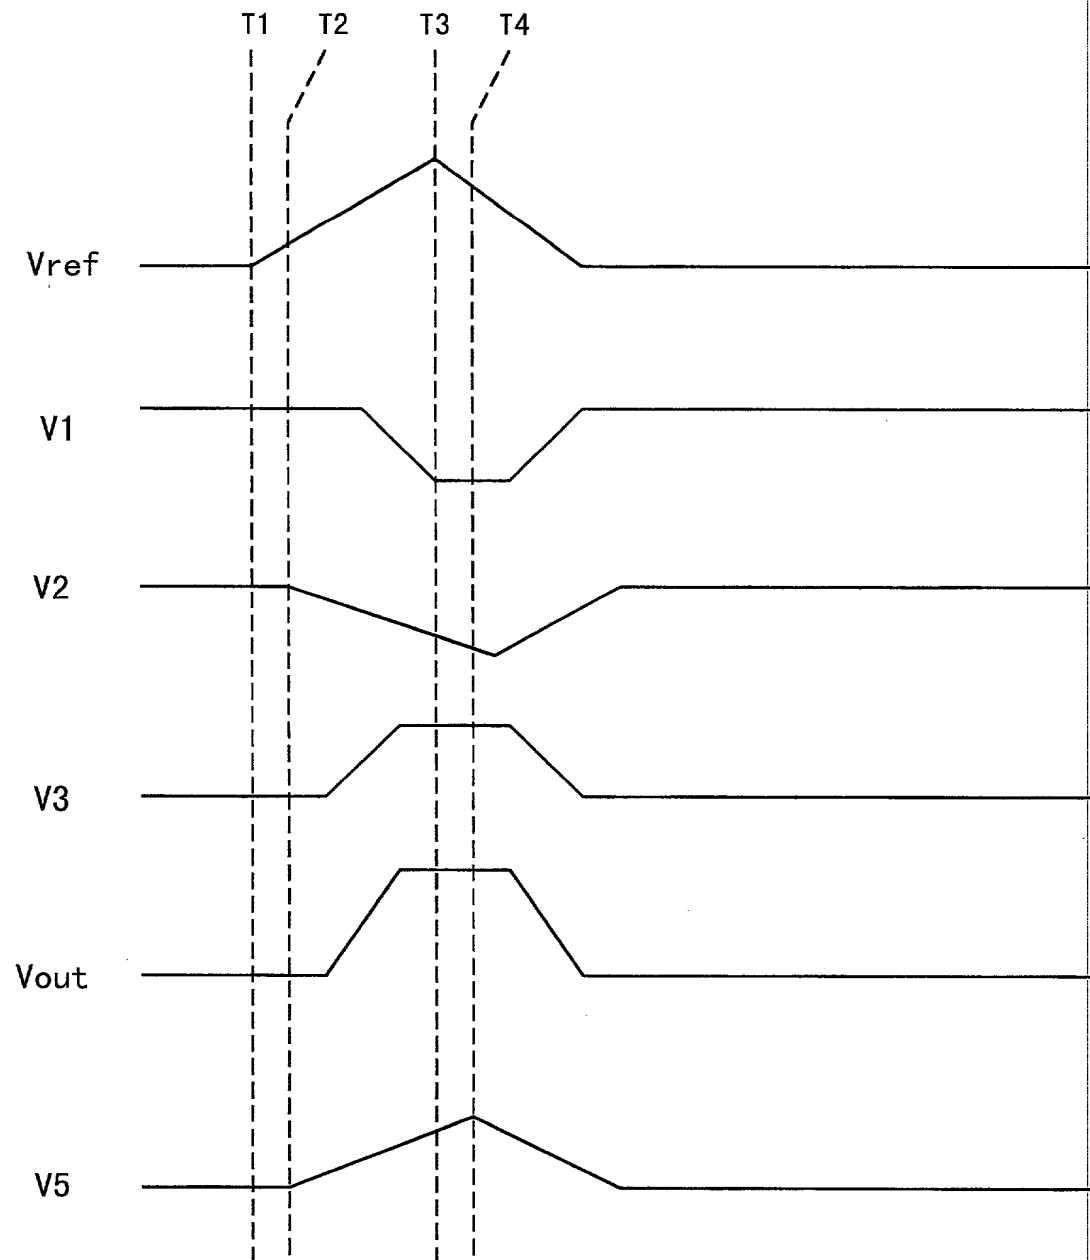
FIG. 6

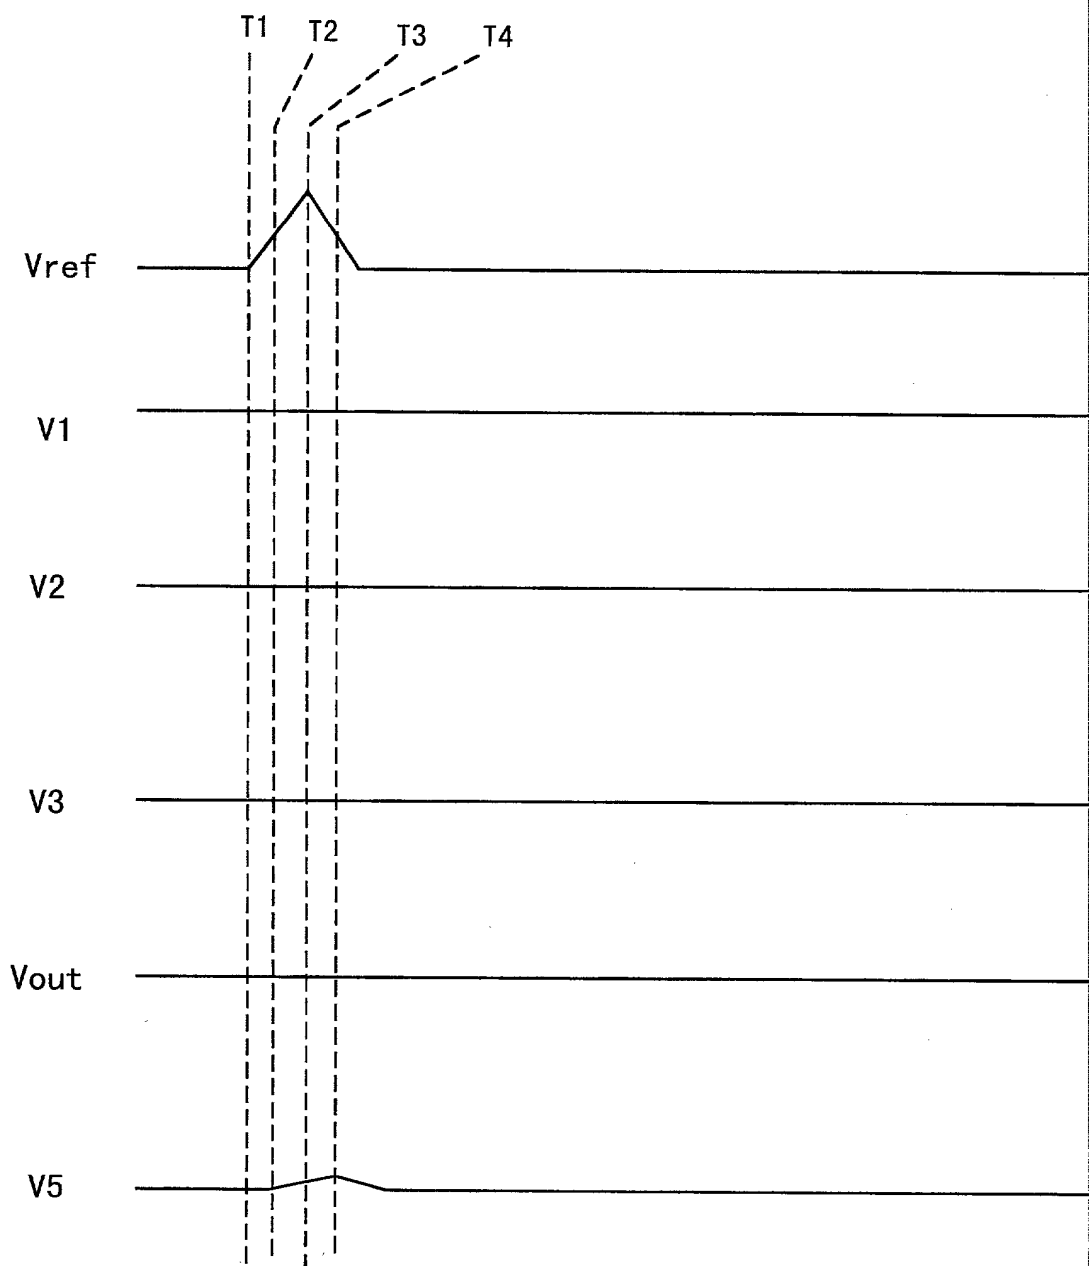
FIG. 7

FIG. 8

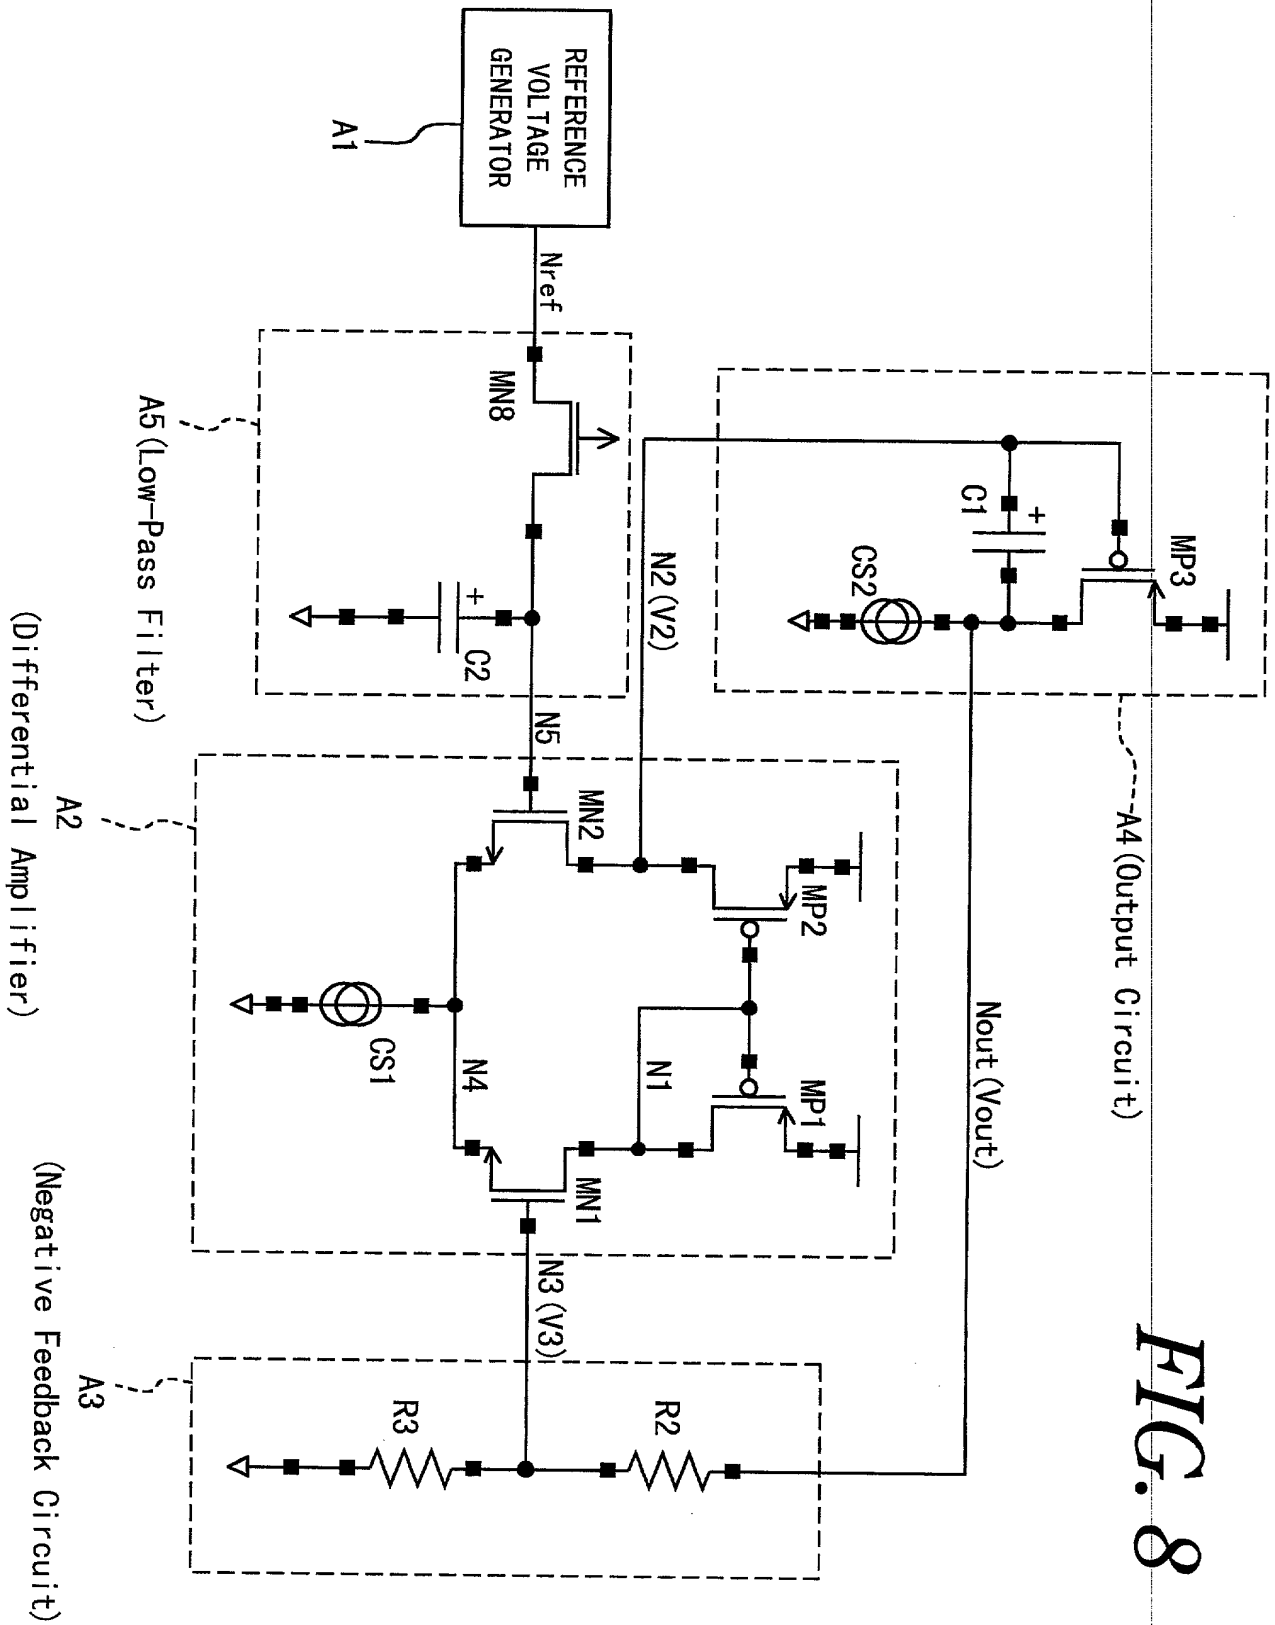
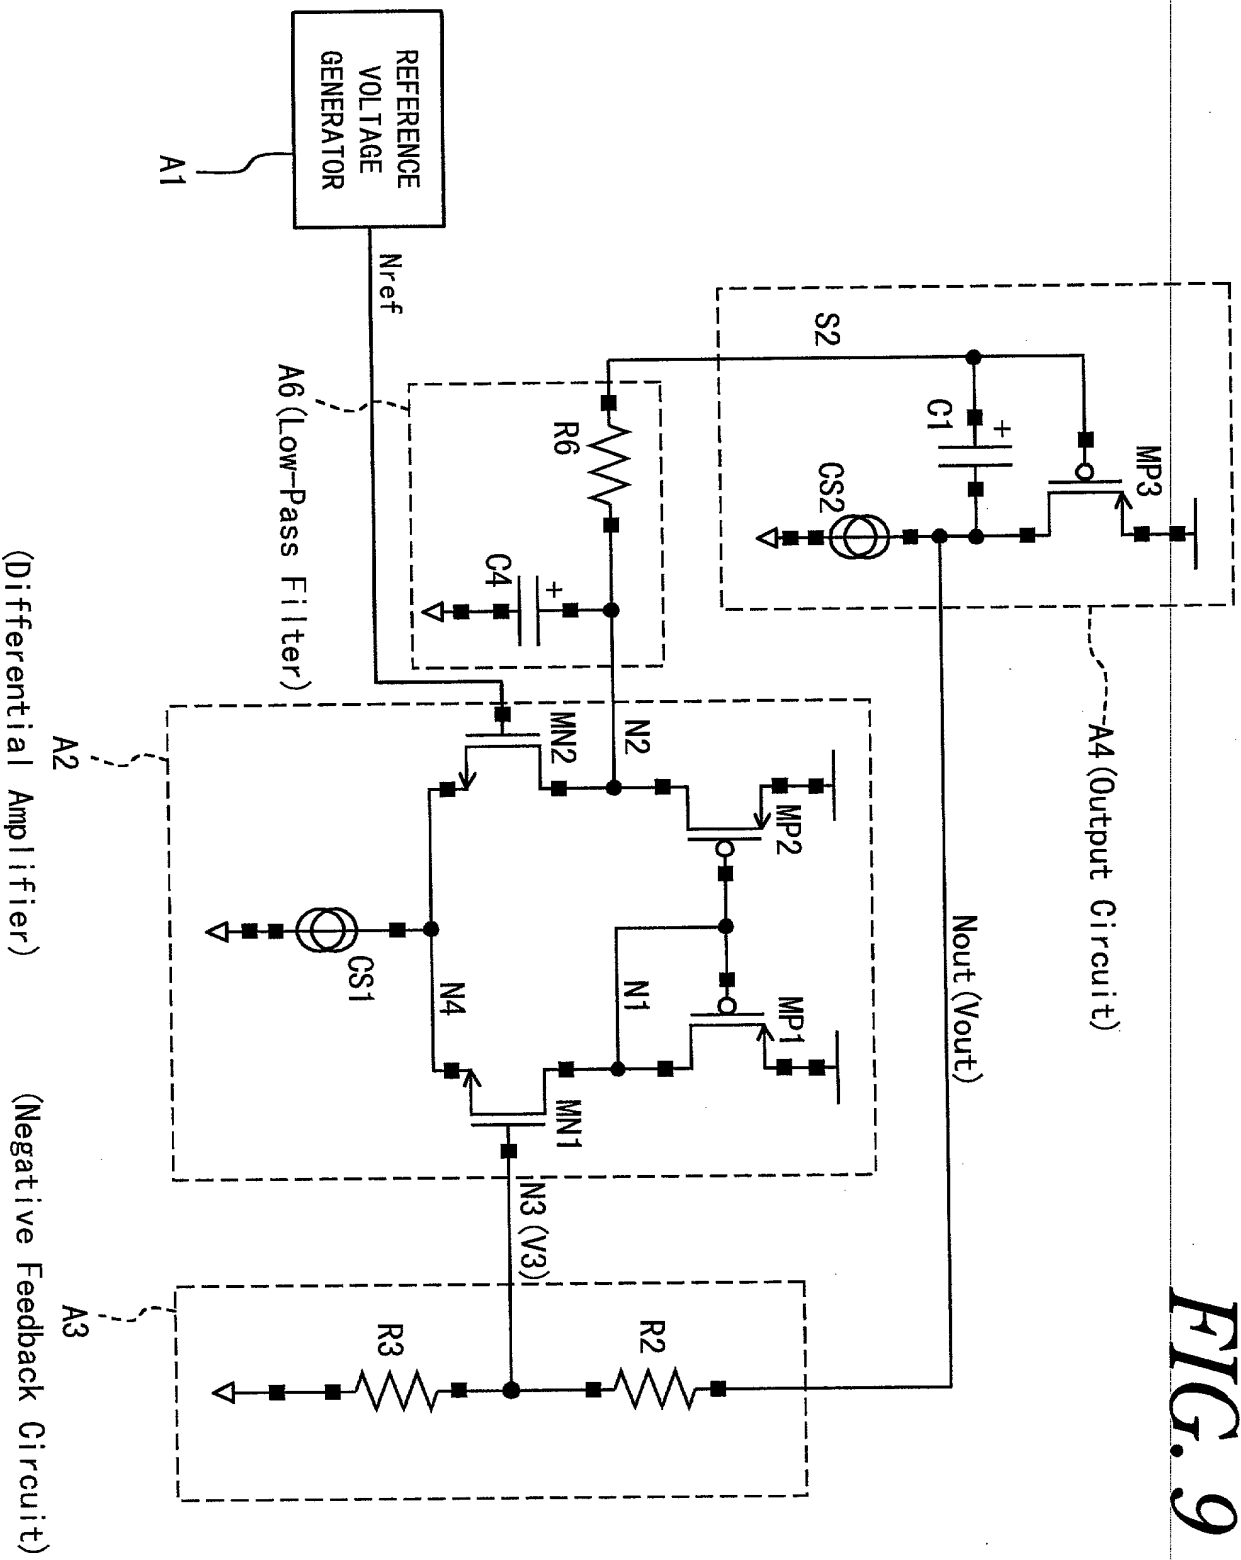
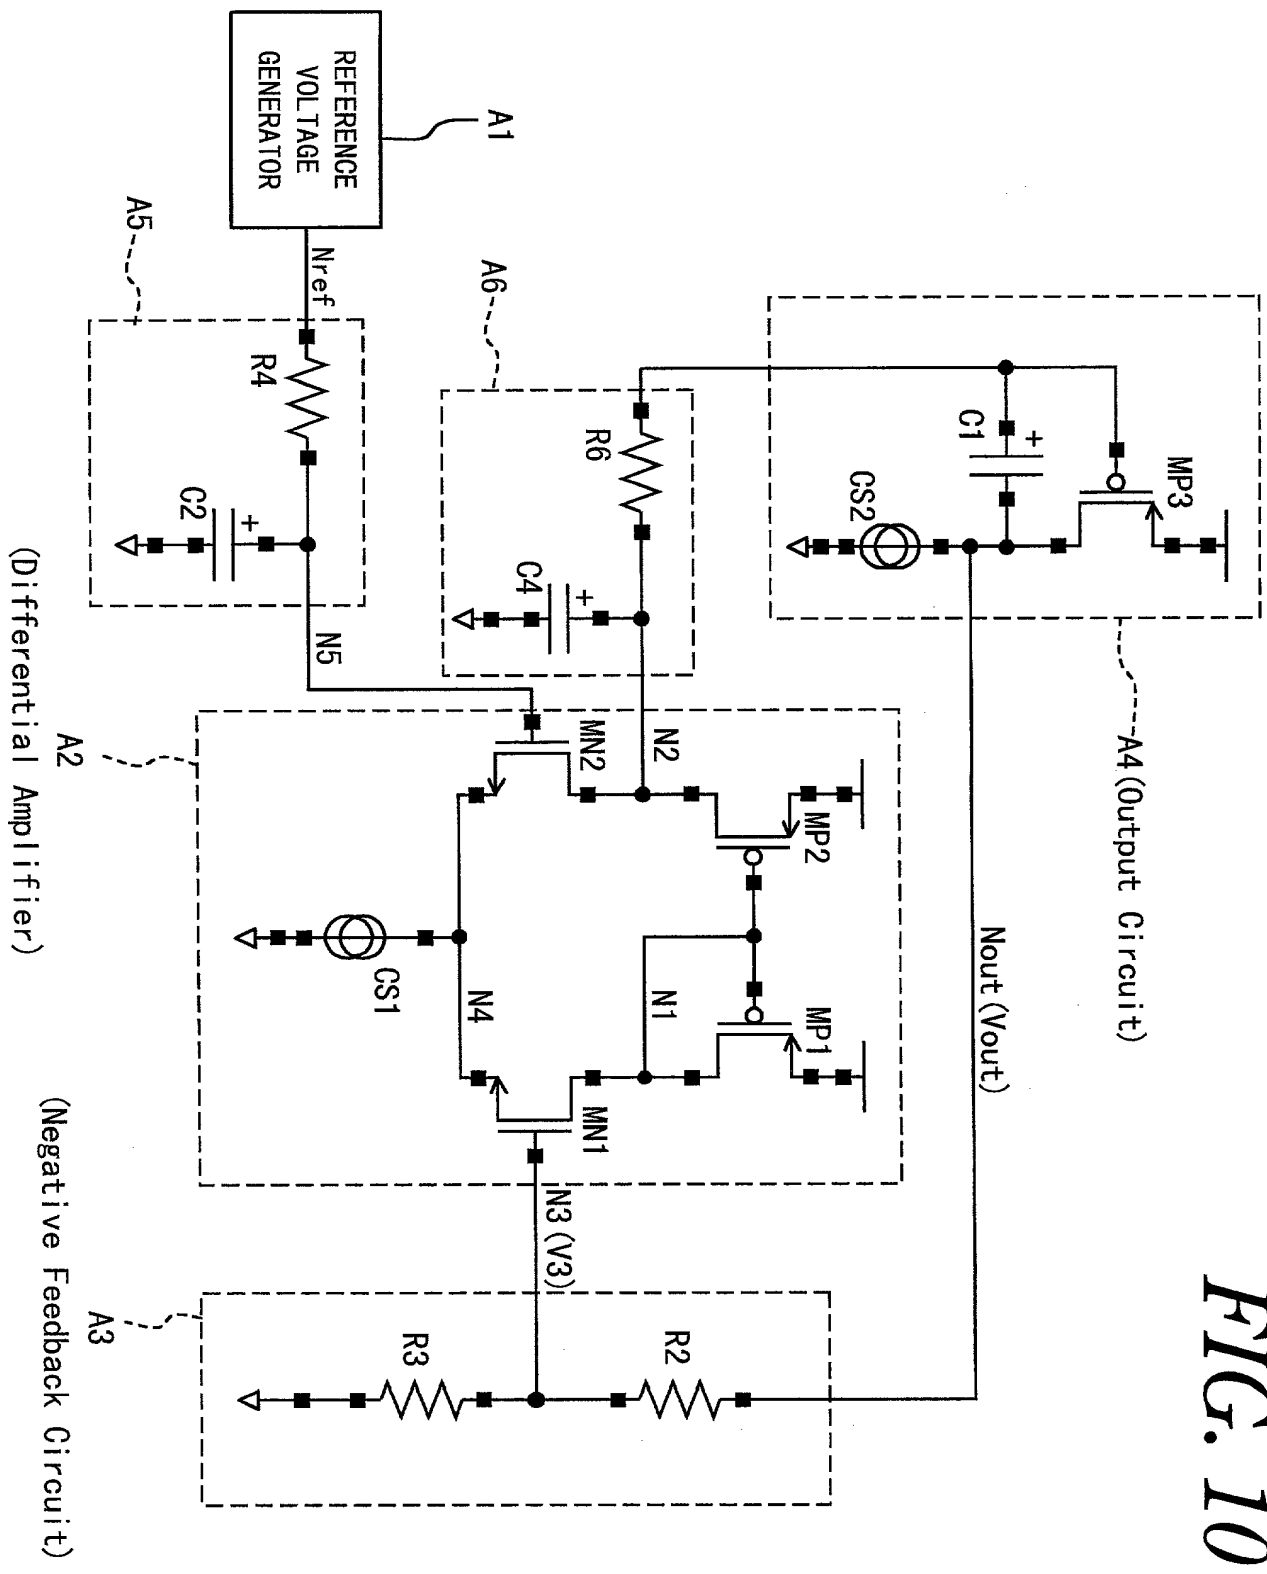


FIG. 9



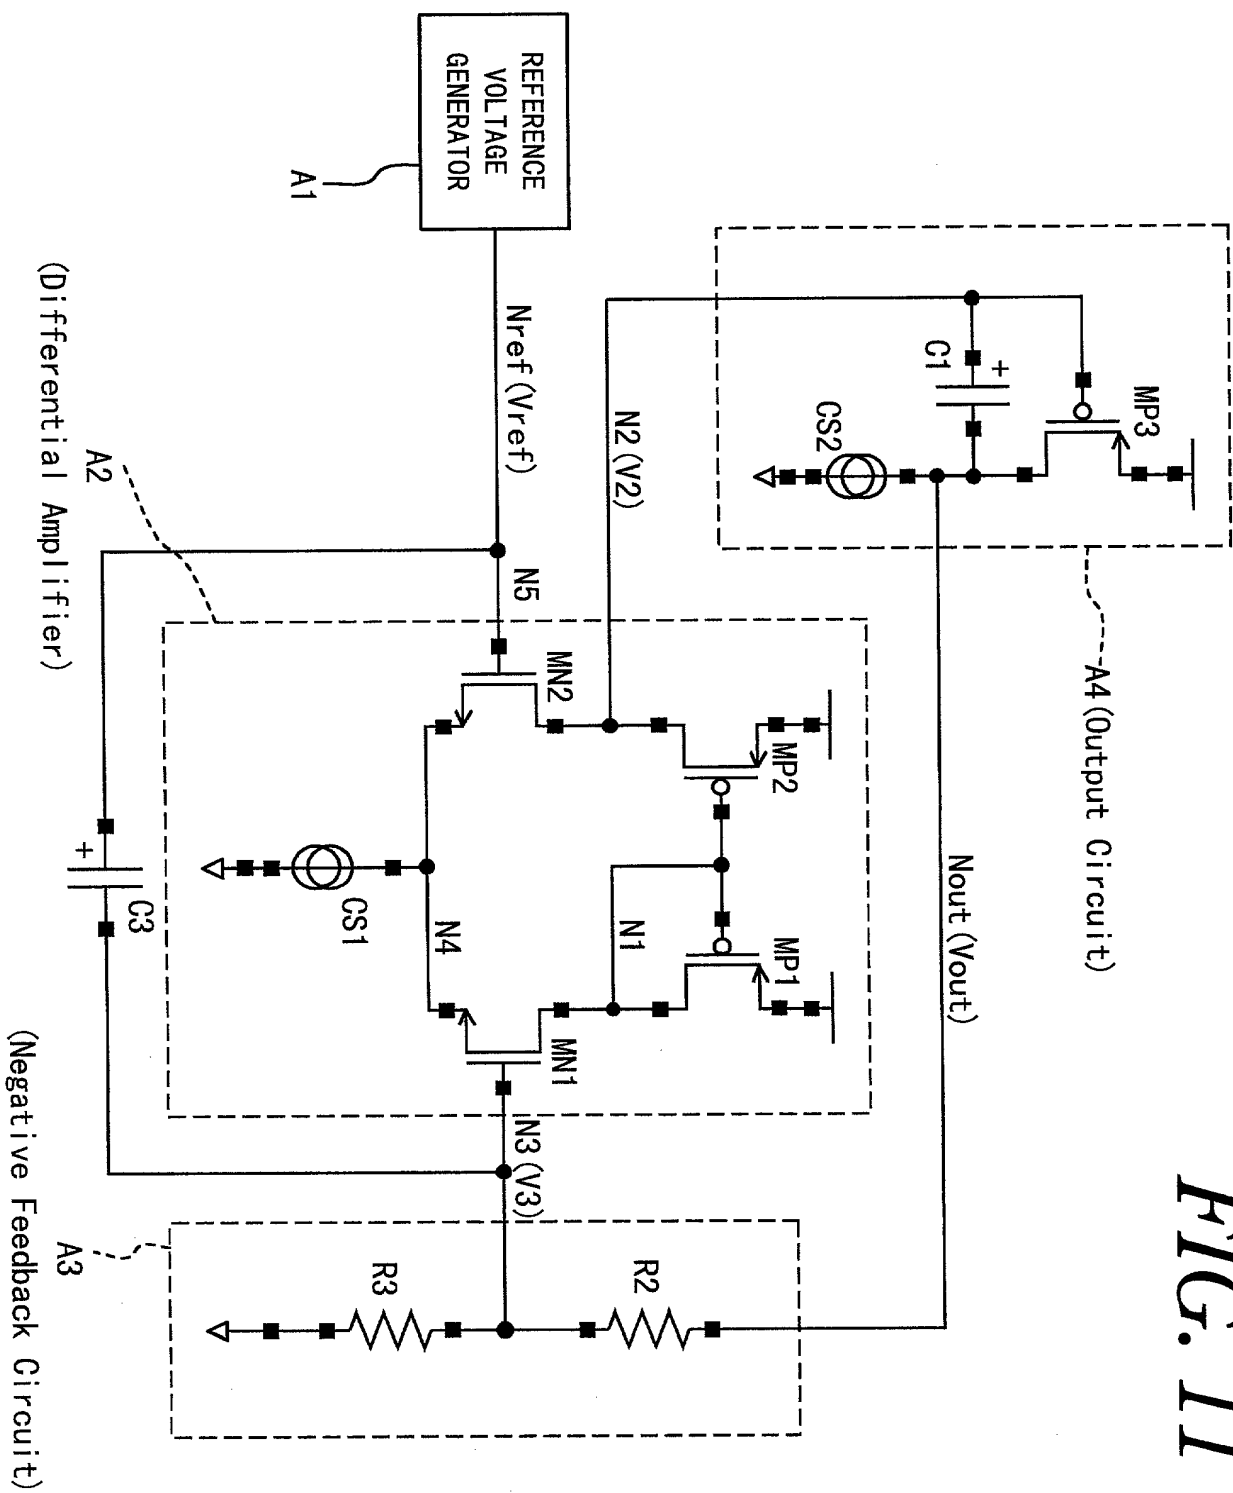
09014401.012793

FIG. 10



09034404.012793

FIG. 11



09034401.012793

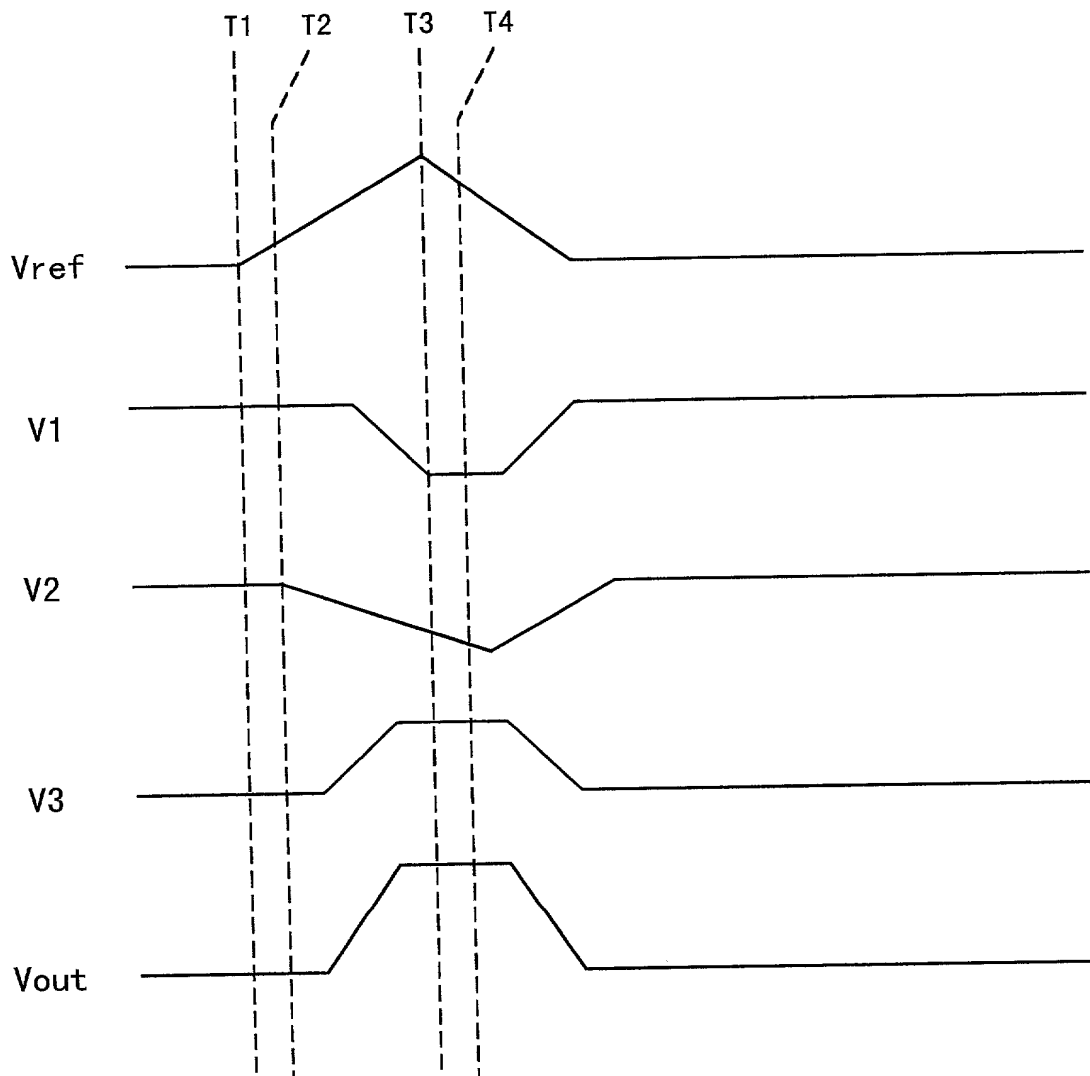
FIG. 12

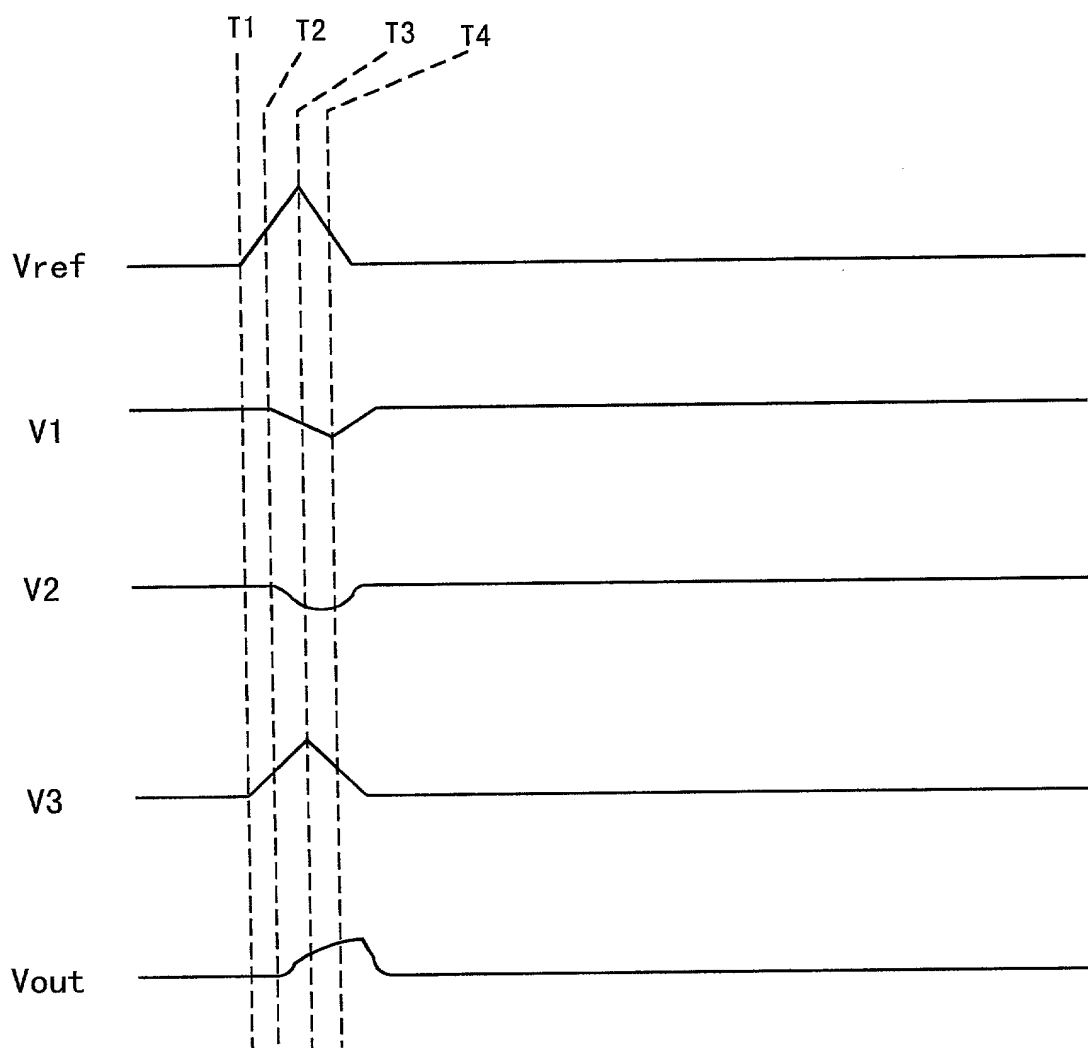
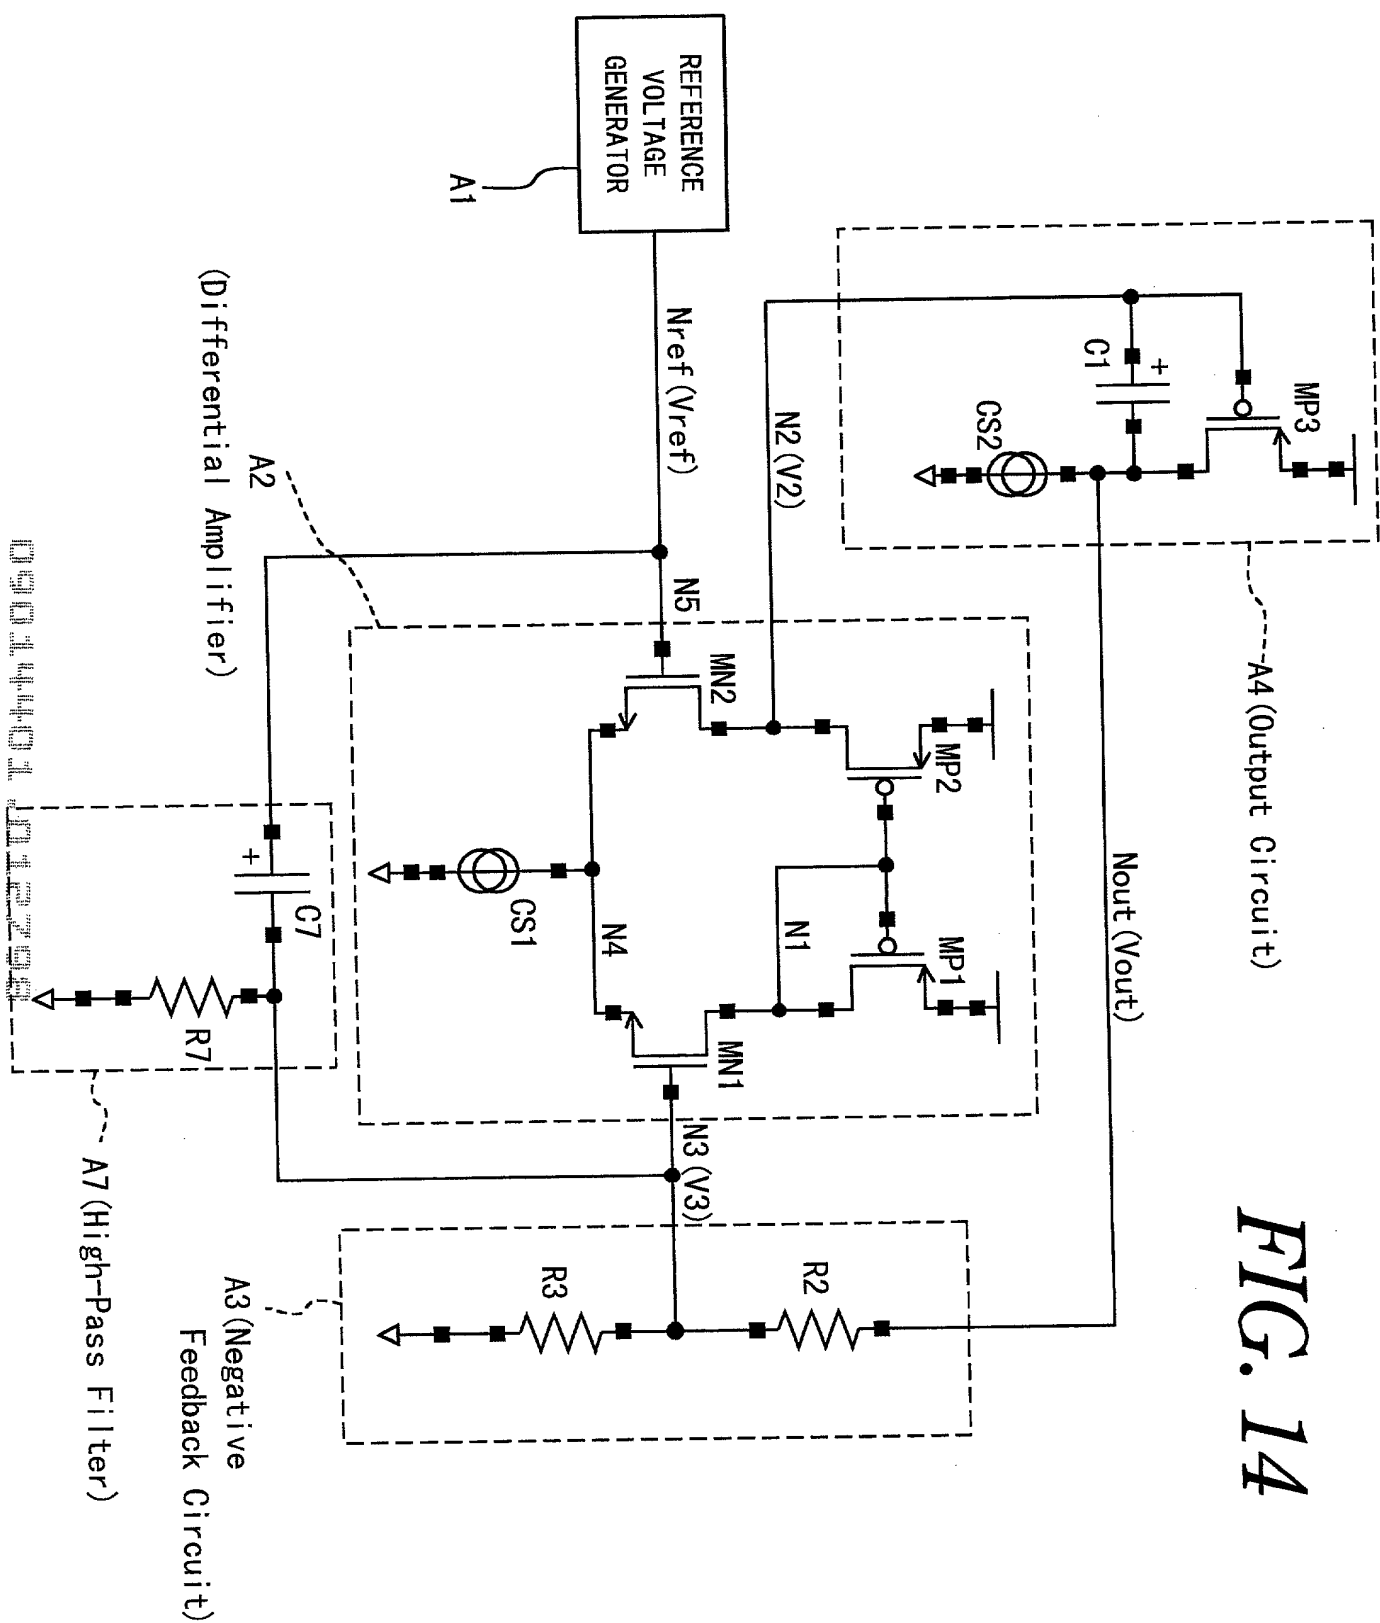
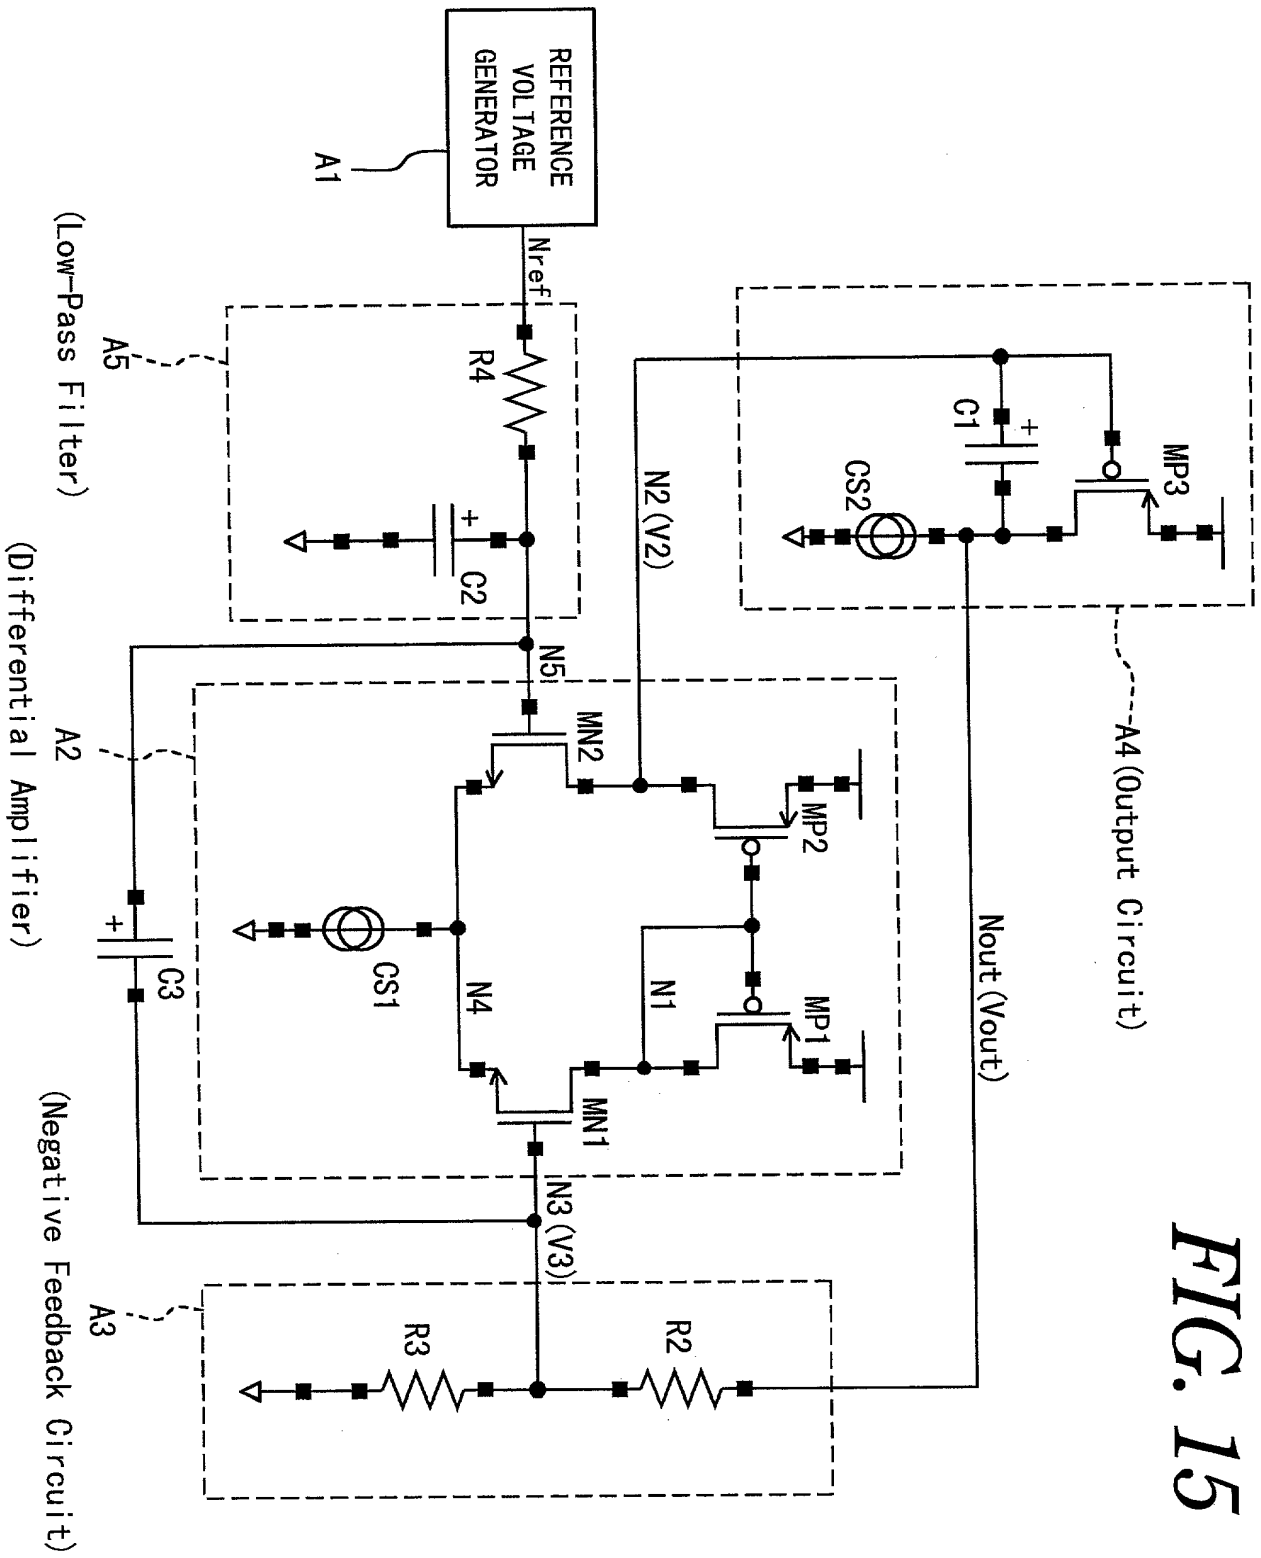
FIG. 13

FIG. 14

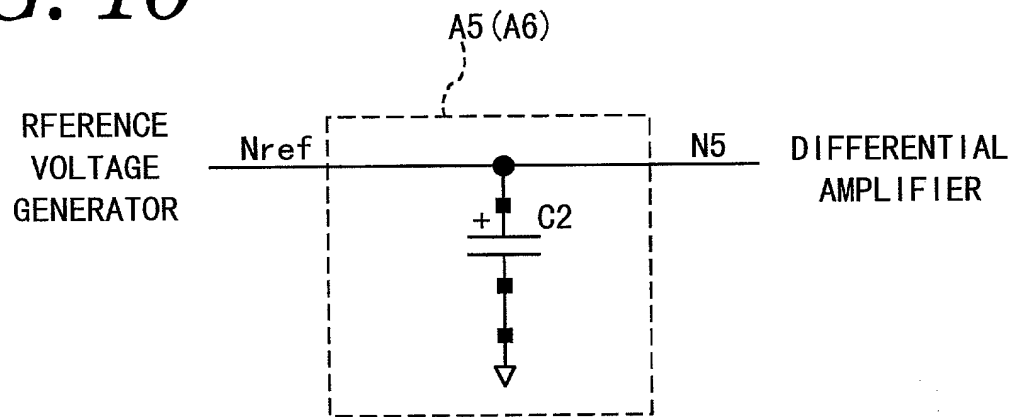
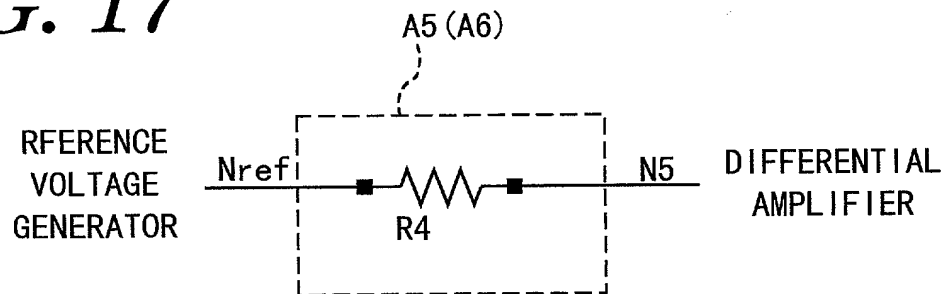
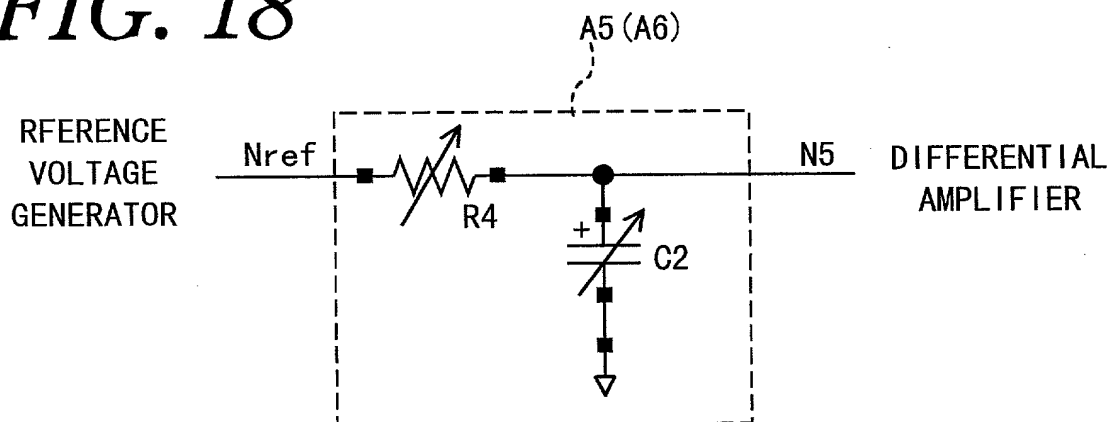


0904440 012233

FIG. 15



09014401.012793

FIG. 16*FIG. 17**FIG. 18*

DECLARATION AND POWER OF ATTORNEY FOR U.S. PATENT APPLICATION

(X) Original () Supplemental () Substitute () PCT () Design

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Title: METHOD AND DEVICE FOR GENERATING CONSTANT VOLTAGE

of which is described and claimed in:

() the attached specification, or

(X) the specification in the application Serial No. filed January 27, 1998 ;

and with amendments through (if applicable), or

() the specification in International Application No. PCT/ , filed , and as amended on (if applicable).

I hereby state that I have reviewed and understand the content of the above-identified specification, including the claims, as amended by any amendment(s) referred to above.

I acknowledge my duty to disclose to the Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 (and §172 if this application is for a Design) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NO.	DATE OF FILING	PRIORITY CLAIMED
Japan	H9-63031	March 17, 1997	Yes

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NO.	U.S. FILING DATE	STATUS: PATENTED, PENDING, ABANDONED

And I hereby appoint John T. Miller, Reg. No. 21,120; Michael R. Davis, Reg. No. 25,134; Matthew M. Jacob, Reg. No. 25,154; Jeffrey Nolton, Reg. No. 25,408; Warren M. Cheek, Jr., Reg. No. 33,367; Nils E. Pedersen, Reg. No. 33,145; and, Charles R. Watts, Reg. No. 33,142, who together constitute the firm of WENDEROTH, LIND & PONACK, jointly and severally, attorneys to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith.

I hereby authorize the U.S. attorneys named herein to accept and follow instructions from Iizuka & Associates as to any action to be taken in the U.S. Patent and Trademark Office regarding this application without direct communication between the U.S. attorneys and myself. In the event of a change in the persons from whom instructions may be taken, the U.S. attorneys named herein will be so notified by me.

Send Correspondence to

Direct Telephone Calls to:

WENDEROTH, LIND & PONACK
Southern Building - Suite 700
805 Fifteenth Street, N.W.
Washington, D.C. 20005

WENDEROTH, LIND & PONACK
Area Code (202) 371-8850

Direct Facsimile Messages to:
Area Code (202) 371-8856

Full Name of First Inventor	FAMILY NAME MATSUI	FIRST GIVEN NAME Katsuaki	SECOND GIVEN NAME
Residence & Citizenship	CITY Tokyo	STATE OR COUNTRY Japan	COUNTRY OF CITIZENSHIP Japan
Post Office Address	ADDRESS 7-12, Toranomom 1-chome, Minato-ku, Tokyo, Japan	CITY	STATE OR COUNTRY ZIP CODE

Full Name of Second Inventor	FAMILY NAME SEKINO	FIRST GIVEN NAME Yoshimasa	SECOND GIVEN NAME
Residence & Citizenship	CITY Tokyo	STATE OR COUNTRY Japan	COUNTRY OF CITIZENSHIP Japan
Post Office Address	ADDRESS 7-12, Toranomom 1-chome, Minato-ku, Tokyo, Japan	CITY	STATE OR COUNTRY ZIP CODE

Full Name of Third Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE

Full Name of Fourth Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE

Full Name of Fifth Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE

Full Name of Sixth Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE

Full Name of Seventh Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE

I further declare that all statements made herein of my own knowledge are true, and that all statements on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

1st Inventor _____ Date _____
 Katsuaki MATSUI
 2nd Inventor _____ Date _____
 Yoshimasa SEKINO
 3rd Inventor _____ Date _____
 4th Inventor _____ Date _____
 5th Inventor _____ Date _____
 6th Inventor _____ Date _____
 7th Inventor _____ Date _____

The above application may be more particularly identified as follows:

U.S. Application Serial No. _____ Filing Date January 27, 1998
 Applicant Reference Number OKI-1820-US Atty Docket No. 1570/1820-US
 Title of Invention METHOD AND DEVICE FOR GENERATING CONSTANT VOLTAGE